




**SPECTRUM**  
INSTRUMENTATION

Perfect fit – modular designed solutions

**35 YEARS**

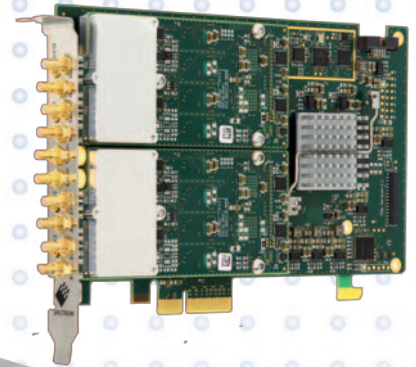

**2025**

Digitizers | Transient Recorders | Arbitrary Waveform Generators | Digital Waveform Acquisition Cards  
for PCI Express, PXI Express and LXI / Ethernet





SPECTRUM

SPECTRUM

Tr97

X2

X1

X0

Clk In

Tr90

Clk In

Clk In

Clk In

Clk In



Gisela Hassler  
CEO



Oliver Rovini  
CTO



Carsten Gralla  
MD

Dear Valued Customers and Partners,

This year marks a significant milestone for us – 35 years of delivering high-performance electronic test and measurement solutions. What began as a local engineering support team has evolved into a global provider of innovative PC-based digitizer and generator products, designed to meet the most demanding analog and digital acquisition and generation applications.


At Spectrum Instrumentation, we continue to embrace the rapid advancements in PC technology. Our solutions enable faster automated measurements by leveraging the latest CPUs, GPUs, software languages, and AI tools. Whether your application requires PCIe cards for direct PC integration, PXIe cards for modular systems, or NETBOX instruments for network-based setups, we offer versatile form factors to suit your needs. All our products share the same software development kit (SDK), compatible with both Windows and Linux, ensuring seamless integration across platforms.

Inside this catalogue, you'll find a comprehensive overview of our product range, including high-speed digitizers and arbitrary waveform generators (AWGs). We're especially proud to be expanding our flagship M5i series – our fastest and most advanced line of PCIe cards and NETBOX instruments. These devices offer sampling rates up to 10 GS/s, wide bandwidth, and high resolution, making them ideal for acquiring or generating signals in the GHz range. With streaming speeds reaching up to 13.9 GB/s, they deliver unmatched data throughput for the PC environment.

From entry-level models to high-end systems, our digitizers cover sampling rates from 5 MS/s to 10 GS/s, bandwidths up to 4.7 GHz, and resolutions ranging from 8 to 16 bits. Our AWG portfolio is just as versatile, offering output rates from 40 MS/s to 10 GS/s with 16-bit resolution. All devices are designed to work seamlessly together – ideal for applications such as stimulus-response testing or closed-loop control.

A range of Direct Digital Synthesizers (DDS) is available, designed for multi-tone signal generation and rapid frequency hopping. With exceptional accuracy and unmatched frequency agility, these devices are perfectly suited for high-demand applications, including quantum computing research, advanced communications, and precision laser beam control.

Driven by our mission to “Enable customer progress through absolute customer focus,” we continuously enhance our solutions with features that support a wide range of applications. Large on-board memory, advanced trigger capabilities, and multi-function I/Os make integration simple and efficient.

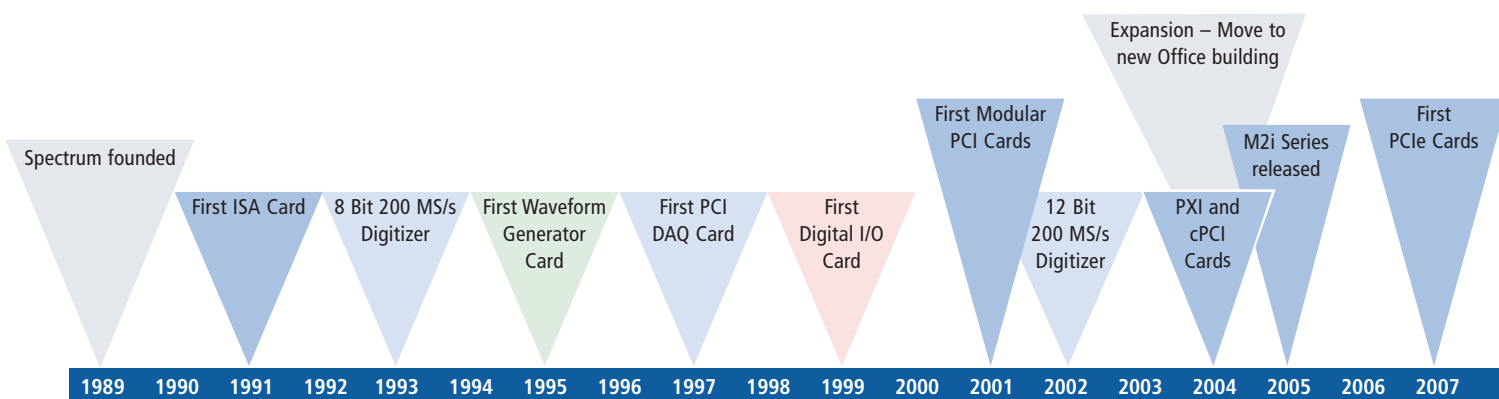

We also offer a broad selection of options including digital I/O solutions, scalable streaming and multi-channel systems, with up to 128 channels, and dedicated software tools. Our SBench 6 Professional software provides a powerful graphical interface for control, visualization, analysis, and documentation. For high-speed data transfer directly to GPUs, our SCAPP package offers a streamlined, low-cost solution.


We hope you find this catalogue both informative and inspiring. Whether you're a long-time partner or new to our products, we're here to support your innovation and help you move forward. We always welcome your feedback, and we look forward to working with you in the year ahead.

Warm regards,  
The Spectrum Instrumentation Team



## Spectrum mission statement

Enable customer progress through absolute customer focus.

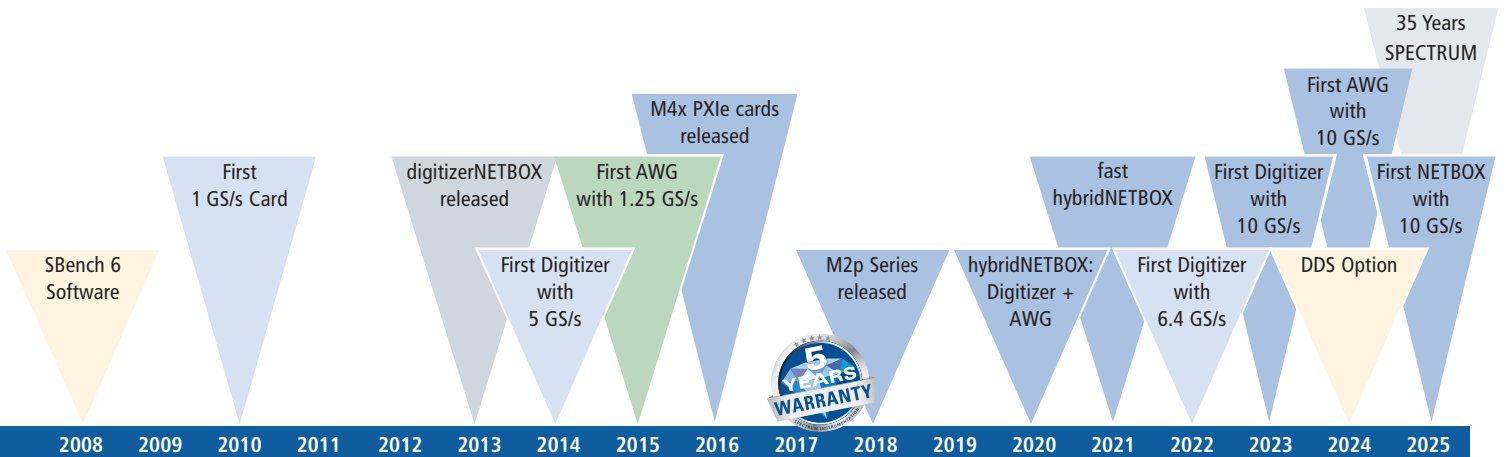

# History .....

**1989**

Spectrum was founded by Gisela Hassler and Michael Janz with the business objective of developing custom-built instrumentation. They started developing an own product line and created the first ISA card in 1991. This digitizer card with 50 MHz and 8 bit called "PAD52" was sold for 17 years until 2008!

Many other ISA digitizers and the first Arbitrary-Waveform-Generator-cards followed in the next years.




**1996**

Spectrum created its first 12 bit digitizer card for the new bus standard PCI with a sampling rate of 80 MS/s. Many other PCI based cards followed.

**2000 and 2001**

Oliver Rovini, who joined the company in 1995 as a software engineer, takes over the position of the Technical Manager after founder Michael Janz left the company. It was Oliver's idea to build modular PCI products, consisting of the same platform card and several different modules. This quickly led to a large range of digitizers, AWGs and digital I/O boards.

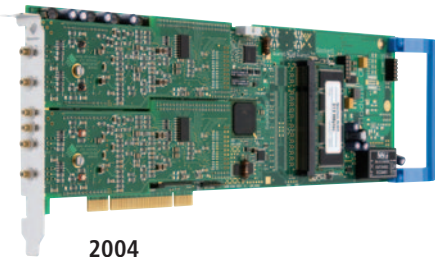

**2004**

Based on the existing MI series and with the benefit of the modular system, a complete range of CompactPCI and PXI cards were launched.

Second, Spectrum introduced the M2i series, the successor of the MI cards with a better interface, more memory and more features.

From 2000 to 2004, thanks to the modular system, the number of different products grew from 18 to 170!

And third, in April the company moved to a much larger building with special areas for the development, production and office.

**2007**

All 90 cards of the M2i-series became available as PCI Express version – the latest bus standard for PC based systems.

**2008**

SBench 6 measurement software was introduced. The software is intuitive to use for comfortable and fast data acquisition and analysis of GByte of analog and digital data in addition to its powerful export and report functions. SBench 6 quickly became a very popular tool.

**2009**

In the year 2009, the M3i series was introduced, starting with a 500 MS/s digitizer and followed by a digitizer card reaching 1 GS/s speed a year later. Meanwhile, the cards of the MI and M2i series were successfully sold around the world, being used in many companies, universities and for many OEM products. All three series formed a range of 320 different products!

**2011**

Spectrum delivered 140 digitizer cards to CERN. Since then, they are used to control the Beam Dumping System of the LHC, the largest particle accelerator in the world.




**2013**

To support the growing business in Asia, Spectrum appointed Gregory Tate as Asian Business Manager. Greg has 30 years of experience in electronics and a deep knowledge of digitizer technology, modular instrumentation and their applications in the Asian market



A totally new product group was launched, the "digitizerNET-BOX". This stand-alone unit contains two Spectrum digitizer cards, offering up to 16 fully synchronized data acquisition channels in one small box with full remote control via Ethernet/LXI from any PC or network.

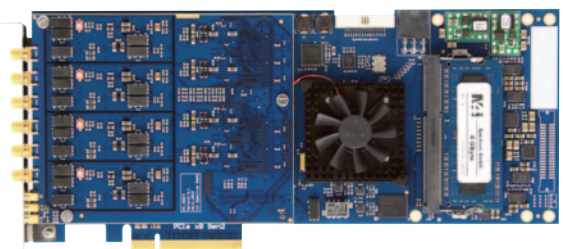

**2014**

Spectrum released the M4i series with 5 GS/s sampling speed! These very fast cards opened new application areas down into the sub-nanosecond range.

**2015**

In the beginning of this year, Spectrum opened its own US office caring for the growing US market and the increasing number of manufacturing representatives. In over 30 other countries, Spectrum already announced distributors to enhance the global sales.

The new M4i series was extended with Arbitrary Waveform Generators offering up to 1.25 GS/s of data generation rate.

**2016**

Spectrum released PXIe version of all its fast M4i-series Digitizers and AWGs. The PXIe cards share the same driver interface and are 100% software compatible with the PCIe cards.




Also, the larger version of the digitizerNETBOX was introduced: Containing up to 6 Spectrum cards, this stand-alone unit offers up to 48 synchronous channels in one 19" chassis with total remote control via Ethernet/LXI.

**2017**

Since the beginning, all Spectrum products are completely designed, built and tested in Germany showing an extremely low failure rate, so Spectrum increased the warranty for its products from 2 years to an industry-leading 5 years.



Also, in this year, the "Spectrum Systementwicklung Microelectronic GmbH" changed its name to the internationally much more understandable "Spectrum Instrumentation GmbH".

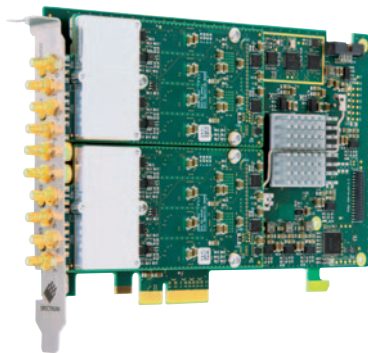**2018**

Spectrum launched a new series called "M2p", with the PCIe platform board being only 168 mm in length, with many different modules forming digitizers in the range of 5 MS/s to 125 MS/s with up to 8 channels on a single card.

**2019**

With the release of the M2p AWG, Spectrum finished the replacement of the older product ranges M1, M2i and M3i and now has a modern range of nearly 200 instrumentation products, all designed within the last 5 years.

**2020**

Spectrum presented the hybridNETBOX, a multi-channel AWG and Digitizer in one box. This single instrument simultaneously generates, acquires and analyzes electronic signals. The first series offered six different models.

**2022**

Spectrum introduced the world's first digitizers using the full PCIe x16 Gen3 Interface for market-leading data streaming at 12.8 GB per second. The M5i.33xx digitizer cards sample at 6.4 GS/s with 12-bit resolution, streaming this huge amount of data continuously to CPUs or GPUs for processing.

**2023**

Spectrum concluded the new flagship digitizer series M5i.33xx with 7 variants; the top models offer ultrafast 10 GS/s sampling speed, 12-bit vertical resolution and 4.7 GHz bandwidth.


**2024**

Spectrum introduced a powerful DDS firmware to turn an AWG of the 66xx-series into a DDS generator with up to 20 sine wave carriers per channel. Additionally, Spectrum launched the 12 DDS generators of the 96xx series with 50 sine waves per channel!

Spectrum also presented the first AWGs with 10 GS/s output rate, the M5i.63xx series.

**2025**

In the beginning of the year, Spectrum introduced the first digitizerNETBOX products with 10 GS/s sampling rate.

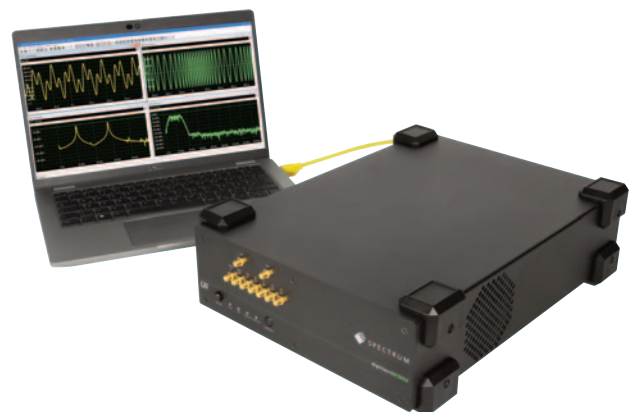

## Spectrum's Philosophy

### Designed to Last

At Spectrum, we believe in long-term partnerships. If it is necessary to end a product line due to obsolete parts, we help with the transition to successor products. Furthermore, all products that have been released since 2000 are available for existing customers as long as we get the parts on the market. Support, updates, repairs and calibration is part of the long life cycle.

### Modularity Brings Flexibility

Spectrum has a unique design philosophy. By using a modular design, platform boards are populated with different analog and digital daughter-boards as required to create a wide range of performance options – ensuring a perfect match against the required specifications of customers. This allows users to get exactly the specifications that they need without compromise, without delay, and without the price premium of a one-off custom product.

### Production and Pricing

The modular approach enables Spectrum to mass-produce platform boards and daughter-boards. We then pass on the cost savings of this method to our customers, ensuring Spectrum is always competitively priced. It gives purchasers the advantages of a customized solution without a price premium – often more competitively priced than rivals' standard products – all thanks to the benefits of mass-produced modular design.

### Rapid Time to Customer

Spectrum's modular design also enables products to be rapidly built to order and fully tested from stock boards so that customers receive their deliveries quickly.

### Wide Selection Choice

To match as many applications as possible, Spectrum offers the widest range and choice. Digitizers are available with sampling rates from as low as 5 MS/s to as high as 10 GS/s, allowing you to capture signals from the Hz to the GHz range. Models offer vertical resolution from 8 to 16 Bits and they're optimized for dynamic performance to ensure the best possible accuracy and precision. Acquired signals can be stored in large on-board memories, processed using the latest FPGA technology, or transferred directly to other devices such as GPU cards and external storage devices via a variety of versatile readout modes. Similarly, our AWGs offer output rates from 40 MS/s up to 1.25 GS/s making them suitable for producing almost any wave shape with signal frequency content from DC to 400 MHz or as an option even up to 600 MHz.

### Customized Products

If you can't find the product you need in this catalog then let us know your mandatory specifications and we will be happy to investigate the possibility of making a customized product just for you!

## Perfect fit – modular designed solutions



### Support and Warranty

Customer satisfaction is our highest priority so when you buy a Spectrum product we expect you will be pleased. All our products are designed and manufactured in Germany where we endeavor to attain the highest quality and reliability. The same philosophy applies to technical support. Our engineers are at your disposal. Need help on a software or hardware issue? Just send us a message to [support@spec.de](mailto:support@spec.de) and our engineers will respond to you directly. You can have confidence that your message will be answered by the right specialist for the task. All the technical support from our engineers and partners is free, with no hidden charges. Spectrum products are covered by an industry leading five years warranty while software and driver updates are available to download free of charge from our website for the lifetime of the product.

In the unusual event that a repair is necessary our service department will assist you to make it happen as quickly and efficiently as possible. We will diagnose the problem and then help you to get the repair made in the fastest and most cost effective way.

Spectrum also offers a complete calibration service. Calibration is performed with fully certified instruments ensuring traceability and specification confidence. All products are manufactured and tested to meet our rigid design standards and they are shipped with the CE mark to certify that they meet all the necessary requirements of the European CE directives.

—	Prefaces	Page 4
—	History	Page 6
—	Spectrum's Philosophy	Page 8
—	Applications	Page 10
—	PCIe Platform	Page 12
—	PXIe Platform	Page 13
—	Ethernet Platform	Page 14

—	Add-on Features	Page 16
---	-----------------	---------

### Digitizers

—	Digitizers	Page 18
—	Features & Modes	Page 19
—	33xx Series – Ultra-Fast 12 Bit Digitizers up to 10 GS/s	Page 20
—	22xx Series – High-Speed 8 Bit Digitizers up to 5 GS/s	Page 22
—	44xx Series – High-Speed High Resolution 16 Bit Digitizers up to 500 MS/s	Page 24
—	59xx Series – 16 Bit General Purpose Digitizers up to 125 MS/s	Page 26

### Arbitrary Waveform Generators

—	Arbitrary Waveform Generators	Page 28
—	Features & Modes	Page 29
—	63xx Series – Ultra-Fast 16 Bit Arbitrary Waveform Generators up to 10 GS/s <b>New Products</b>	Page 30
—	66xx Series – High-Speed 16 Bit Arbitrary Waveform Generators up to 1.25 GS/s	Page 32
—	65xx Series – 16 Bit Arbitrary Waveform Generators up to 125 MS/s	Page 34
—	96xx Series – DDS Generators with 50 tones per channel and up to 200 MHz <b>New Products</b>	Page 36

### Digitizer and AWG in one box

—	hybridNETBOX – hybridNETBOX up to 125 MS/s	Page 38
—	hybridNETBOX – hybridNETBOX up to 500 MS/s	Page 39

### Digital Data Acquisition and Digital I/O

—	Digital Data Acquisition and Digital I/O	Page 40
—	77xx Series – 32 Channel Digital Waveform Acquisition	Page 41
—	75xx Series – versatile fast Digital I/O card	Page 42
—	Examples for Systems with Star-Hub synchronization	Page 43

### PC Systems

—	Turn-Key High-Performance Streaming Systems	Page 44
—	Multi-Card PC Systems and Docking Stations	Page 45
—	Accessories	Page 45

### Software


—	Software	Page 46
—	SCAPP GPU Support	Page 49
—	SBench 6	Page 50

—	Comments from our customers	Page 54
—	Publication	Page 56
—	Social Media	Page 56
—	10 Facts about Spectrum	Page 57
—	Imprint	Page 58



### Communications

- 14 and 16 Bit Resolution
- Time and Frequency Domain Analysis
- Advanced Display Modes

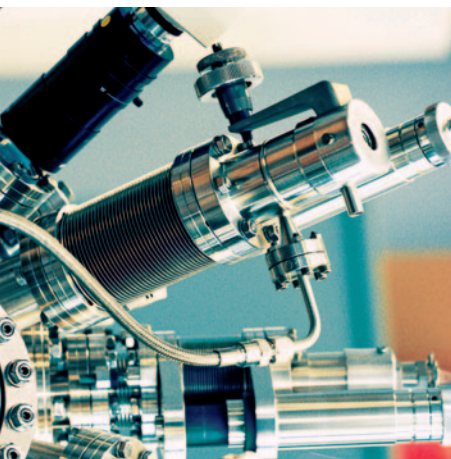

### Spectroscopy

- Ultrafast Data Transfer
- Large Acquisition Memories
- On-Board Signal Averaging




### Astronomy

- High Sampling Rates and Resolution
- Time and Frequency Domain Analysis
- Low-noise Front-End Circuitry

When it comes to applications where custom specific measurements are necessary, modular PC-based instrumentation offers a host of advantages over conventional stand-alone testing devices. The approach allows you to take advantage of the latest developments in PC technology: accessing the most powerful processors, fastest bus speeds, and state-of-the-art graphical tools. Furthermore, you have the unrivaled flexibility of creating your own application specific programs, selecting from an ever expanding array of shareware utilities, or utilizing a wide variety of third party analysis products.


Spectrum Instrumentation products are powerful and universal PC-based instruments that can be used in nearly any application that needs an interface between the electrical analog world and PC-based data analysis, calculation, display and storage. The scalability of the products covers anything from single channel OEM medical or ultrasound devices to multi-channel transmission and reception communication design. Intelligent designed synchronization structures allow to scale-up even to hundreds of synchronous fast channels.

This page shows a number of common application areas where Spectrum products are found.

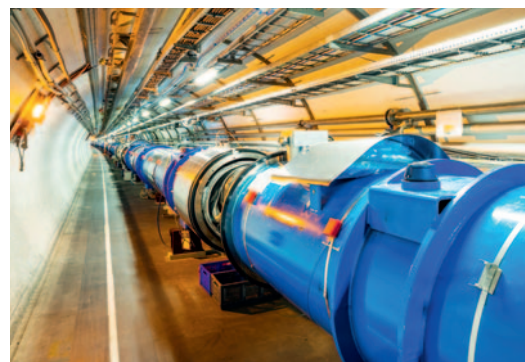

### Big Physical Experiments

- Distributed Ethernet Acquisition
- High Channel Density with Hundreds of Synchronous Channels
- Combination of Slow and Fast Channels

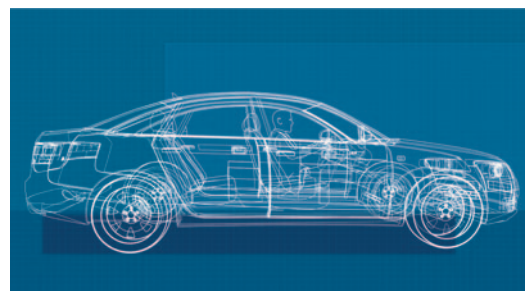


### Automotive

- Acquisition and Replay of Analog and Digital Signals
- Combination of Slow and Fast Channels
- Portable (DC Supply) Systems



### Aerospace

- High Sampling Rates and Resolution
- Data Streaming and Storage
- Ultrafast Data Transfer (>12.8 GB/s)

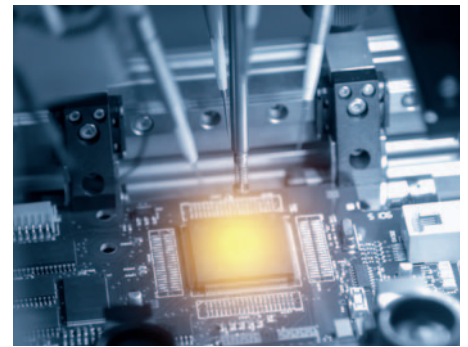

### Semiconductor Tests

- LXI, PCIe and PXIe Modules
- Optimized SNR and SFDR
- Fully Functional Front-End Circuitry




### Fiber Optics (DTS, DAS, OTDR)

- 14 and 16 Bit Resolution
- Fast Data Rates
- Block Averaging




### Acoustics

- Low-Noise and High Resolution
- Very high SNR (> 90 dB) and SFDR (>105 dB)
- Hundreds of Synchronous Channels

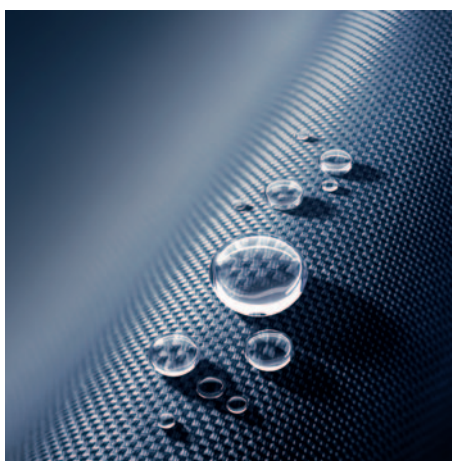


### Nanotechnology

- Low-Noise High Dynamic Range Acquisition
- Precision Signal Generation
- High Gain Amplification

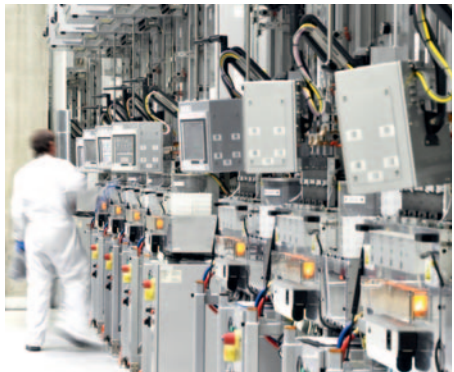

### ATE – Automatic Test Equipment

- LXI and PXIe Modules
- Acquisition and Generation
- LabVIEW, MATLAB and IVI Interface

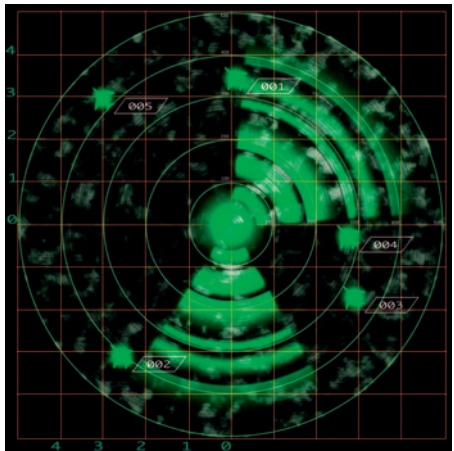


### Radar

- 14 and 16 Bit Resolution
- Segmented Memory and FIFO Readout
- Acquisition and Generation (Continuous Radar Simulation)




### LIDAR

- Advanced Acquisition and Readout Modes
- Block Averaging
- Low-Noise, High SNR

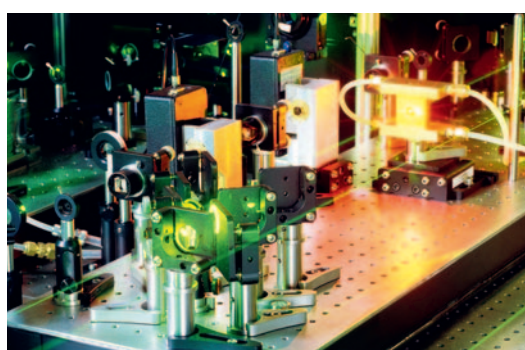

### Laser

- 6.4 GS/s Sampling Rates and High Bandwidth
- Fast Trigger and Read-Out Rates
- On-Board Block Statistics (Peak Detection)

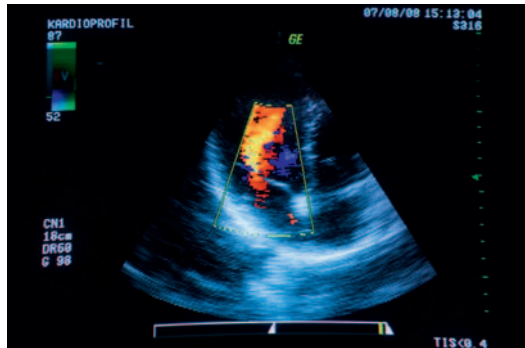

### Ultrasound

- 14 and 16 Bit Resolution
- Segmented Memory with FIFO Readout
- Low Dead-Time Between Triggers (< 80 ns)




### High Voltage Testing

- Fully Buffered Front-End Circuitry
- Single-Ended and Differential Inputs
- On-Board Block Statistics (Peak Detection)




### Medical Science (OCT)

- High Sampling Rates and Resolution
- Fast Trigger and Read-Out Rates
- External Clock

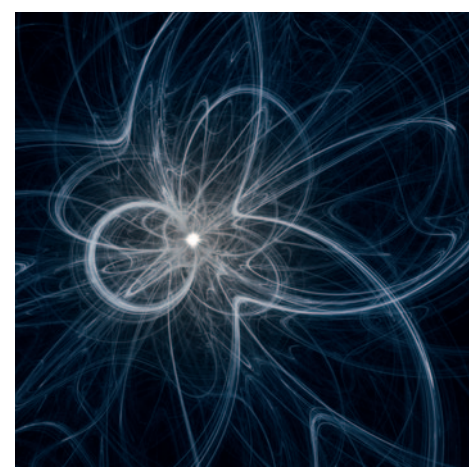

### Quantum Science

- Versatile Signal Generation
- High Speed Data Streaming
- SCAPP GPU Support

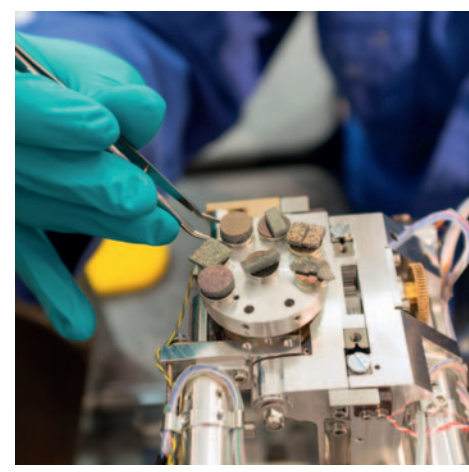

### Materials Science

- Flexible Front-End Signal Conditioning
- High Resolution Recording
- Fully Synchronous Multi-Channel Acquisition

PCI Express is the standard platform for all current PC-based systems and also for the future. Today's state-of-the-art motherboards normally have a couple of PCI Express slots but only one or two PCI/PCI-X slots. The PCI Express bus is a point to point connection allowing full speed for every single slot. The Express bus is freely scaling and is available with 1 lane (x1), 4 lanes (x4), 8 lanes (x8) and 16 lanes (x16). For mechanical compatibility connectors may have more lanes than are connected to the motherboard.




### ▶ M5i PCI Express

- PCIe x16 Gen3 Interface
- Up to 13.9 GB/s streaming
- SMA connectors
- Drivers for CUDA-GPUs



### ▶ M4i PCI Express

- PCIe x8 Gen2 Interface
- Over 3.0 GB/s streaming
- Sync of up to 8 cards
- SMA & MMCX connectors
- Drivers for CUDA-GPUs

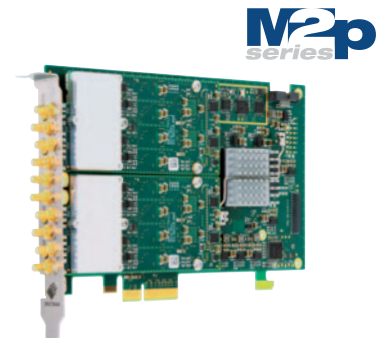

### ▶ M2p PCI Express

- PCIe x4 Gen1 Interface
- Over 700 MB/s streaming
- Sync of up to 16 cards
- SMB & MMCX connectors
- Drivers for CUDA-GPUs

## ▶ Advantages of the PCIe platform

- Universal bus system incorporated into millions of commercial and industrial systems world-wide
- Scalable PC platform from low-cost, low-end up to high-performance, multi-processor, multi-core
- Wide choice of components like ultra-low noise power supplies, additional interface cards or high-performance graphics cards
- Very fast backplane (PCIe lanes) – capable of very fast streaming to SSD arrays
- Direct interconnection with GPU for data processing possible (SCAPP option)
- Easy system extension via wide choice of PCIe extension components

## ▶ Record-breaking Continuous Streaming Speed


In March 2022, Spectrum presented the M5i, the world's first digitizer using the full PCIe x16 Gen3 interface (see page 18). On selected systems, a record-breaking continuous streaming speed of 13.9 GB/s is possible!

The M4i series is using PCIe x8 Gen2 interface with more than 3 GB/s streaming, reaching 3.4 GB/s on selected motherboards.

The M2p-series with PCIe x4 Gen1 offers more than 700 MB/s streaming.



### Digital Option for MIXED MODE testing

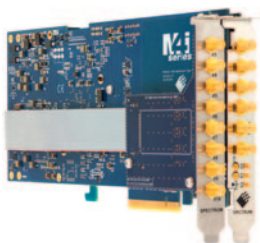


Digital module for M4i.44xx family

The digital expansion modules add programmable digital I/O lines to the digitizer and AWG cards. These lines acquire digital channels synchronously with the analog channels when used on a digitizer and can be used as synchronous digital outputs (marker outputs) when used on an AWG card.

The M2p-module (for the 59xx digitizers and 65xx AWGs) carries 16 SMB-connectors with 10 of them directly located on the front plate and is also available with a flat-ribbon 40-pole FX2 connector which is pin compatible to all older digital expansion options of Spectrum. The M4i-module (for the 44xx digitizers) offers 8 additional digital channels via SMA connectors.



Digital module for M2p family





## Option Synchronization Star-Hub


The Star-Hub is an additional module allowing the phase stable synchronization of up to 16 boards (M2p series) or up to 8 boards (M5i series, M4i series). Independent of the number of boards there is no phase delay between all channels. The piggy-back module distributes clock, trigger and control lines to all connected cards and can be ordered in two different mounting positions: as extension module, extending the carrier board without adding the need for an additional slot space; or as top mount module, keeping the board length the same but needing an additional slot space.

All connected boards are running with the same clock and the same trigger. Each board is internally connected with a small cable of the same length, even the carrier board. That minimizes the clock skew between the different boards. The clock skew is down to 130 ps between any two cards, depending on the family used.

On the M2p series the Star-Hub allows the synchronization of various cards when running with different sampling rates. This allows a mix of slow and fast sampling as well as the mixing of acquisition cards and generator cards in one system whilst still preserving the phase relation between the different channels.

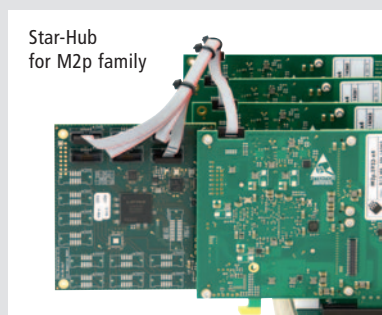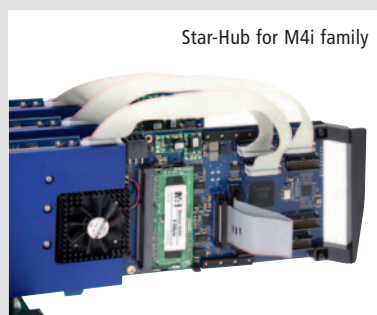Star-Hub  
for M2p family

Star-Hub for M4i family

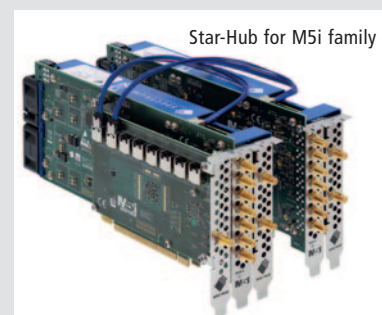

Star-Hub for M5i family



PXI Express or PXIe is a subset of the PXI standard that replaces the parallel data bus of PXI with a high-speed serial interface. PXIe provides the most advantages for modular instruments like digitizers or arbitrary waveform generators which often need to transfer large amounts of data. For example, state-of-the-art PXIe products from Spectrum incorporate a fast interface that can stream at rates of up to 1.7 GByte/s.

## ► M4x PXI Express Platform

- PCIe x4 Gen2 Interface
- More than 1.5 GByte/s streaming rate
- 3U double-width card
- PXIe reference clock supported
- PXIe trigger bus and star trigger supported
- SMA and MMCX connections

## ► Advantages of the PXIe platform

- Industrial systems with robust connections
- Defined clock and trigger interconnection between the cards and the chassis
- Front-side card handles for easy exchange
- Defined air-stream for cooling
- Different chassis sizes from 4 slot up to 21 slot available
- Mix and match components from different vendors




## ► Outstanding Continuous Streaming Speed

The optimized firmware and kernel driver of the Spectrum PXIe cards allows a sustained streaming speed between card and PC of more than 1.5 GByte/s, reaching 1.7 GByte/s on selected systems. The on-board memory of 4 GByte is completely used as a FIFO buffer.

# Ethernet Platform ..... digitizer**NETBOX** ..... generator**NETBOX** hybrid**NETBOX**

The digitizerNETBOX/generatorNETBOX is a remote solution that is connected by Ethernet using the LXI standard. The device can be used as bench-top instrument directly connected to a laptop or desktop PC or as 19" instrument connected to the company LAN and accessible from anywhere.

- Complete portable instrument solution
- Connect directly to your PC or Laptop or anywhere in the company LAN
- BNC (< 125 MS/s) or SMA (> 125 MS/s) connectors
- SBench 6 Professional software license included
- 19" and DC power supply options available

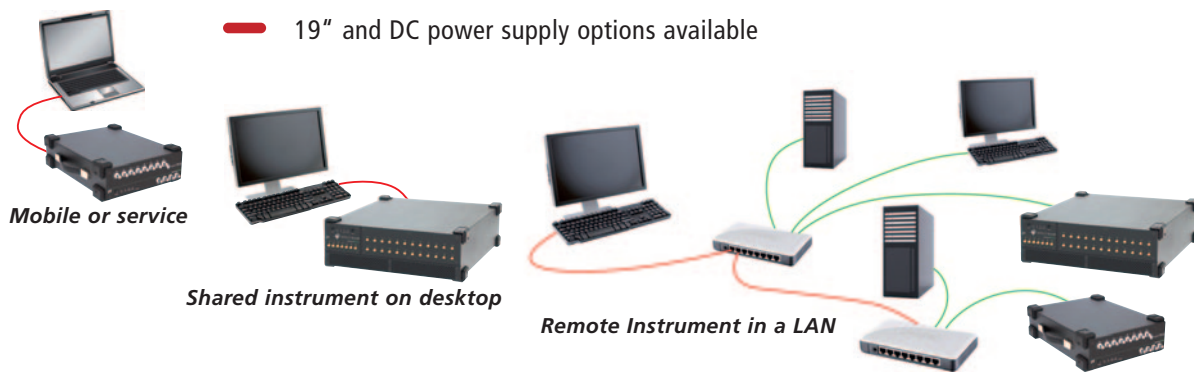

## DN2 Series

Small and portable LXI/Ethernet device with up to 16 channels

Up to 16 analog channels with either BNC or SMA connectors. Full analog interface with programmable ranges, termination and offset available



The handle, the stackable bumpers, the light weight of only 6 kg and the optional internal DC power supply make it possible to use the DN2 devices for mobile applications, service jobs or for mechanical integration into custom systems.

Each LXI device from Spectrum offers several interconnections with other instruments. Be it trigger or clock input and output, universal I/O lines or a timestamp reference clock input.



19" rack mount kit available as an option

### ▶ LXI eXtensions for Instrumentation

The digitizerNETBOX/generatorNETBOX/hybridNETBOX is a fully compliant LXI instrument that is able to show the status of the box along with the current acquisition/generation information. It offers an IVI compatible interface for the IVI digitizer, IVI scope and IVI FGen classes. LAN eXtensions for Instrumentation (LXI) is a standard developed by the LXI Consortium, an industry consortium that maintains the LXI specification, promotes the LXI Standard, and ensures interoperability. The LXI standard defines the communication protocols for instrumentation and data acquisition systems using Ethernet.




SB6



## SBench 6 – Powerful Data Acquisition and Analysis Software

SBench 6 – The digitizerNETBOX/generatorNETBOX can be used with Spectrum's powerful software SBench 6 – a Professional license for the software is already installed in the box. SBench 6 supports all of the standard features of the instrument (see page 38 for more details).

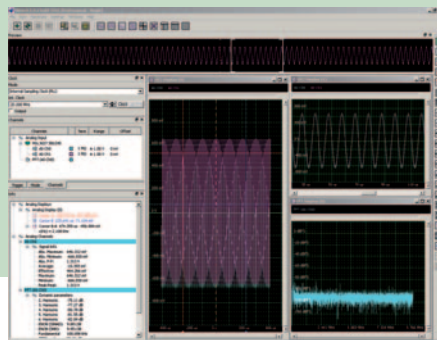

## DN6 Series

19" multi-channel LXI/Ethernet systems which can be used either as desktop or rack mount versions. Up to 48 channels in a single chassis.

Up to 48 analog channels with either BNC or SMA connectors. Full analog interface with programmable ranges, termination and offset available




Powerful cooling fans, a replaceable dust filter and the heavy, well-shielded metal chassis make the DN6 a reliable instrument for industry and research environments.

## ► Embedded Server Option

This option turns the digitizerNETBOX/generatorNETBOX into a powerful PC that can run your own programs on a small and remote data acquisition system. The Ethernet device is enhanced by more memory, a powerful CPU, a freely accessible internal SSD and a remote software development access method.

The enhanced instrument can either run connected to a LAN or it can run totally independently, storing data to the internal SSD. The original remote instrument functionality is fully maintained but running the embedded server option allows the pre-calculation of results inside the unit. Then you can choose to transfer just the information (data or calculated results) that's required in a client-server based software structure. The embedded server option is ideal for surveillance/logger applications, which can run totally independently for days. When necessary, it can send notification emails or alerts over the LAN, or offload stored data as soon as it's connected again.

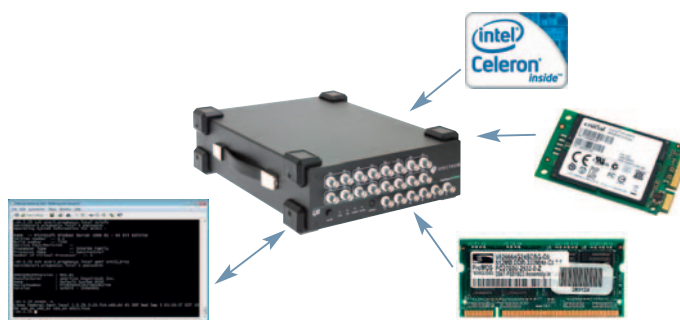


### ► Digital Pulse Generator

Available for our entire product line of 137 different Digitizers and 55 AWGs, the new DPG (Digital Pulse Generator) option adds four independent digital sources for generating pulses and pulse streams. This new capability is ideal for a wide variety of automated test and measurement applications. For example, the DPG option can produce the stimulus and trigger signals needed for machine or experiment control in systems deploying AI, robotics and mechatronics, for closed-loop testing, or even when assessing electronic circuits, components and sensors.


With the DPG option installed, the Digitizer and AWG products can produce digital pulses with a timing resolution that is based on the sampling clock of the device. For instance, the DPG together with one of the flagship 33xx series digitizers can produce up to four separate pulse streams, each with timing resolution down to just 3.2 ns. At the same time, the 12-bit digitizer card can acquire incoming electronic signals by sampling them at rates up to 10 GS/s!

Key parameters, such as the pulse width, period, phase, or the number of pulses in a pulse train, are all programmable. Once enabled, the DPG will output the pre-programmed pulses on the assigned Multi-Purpose I/O connector as soon as it receives a valid trigger.

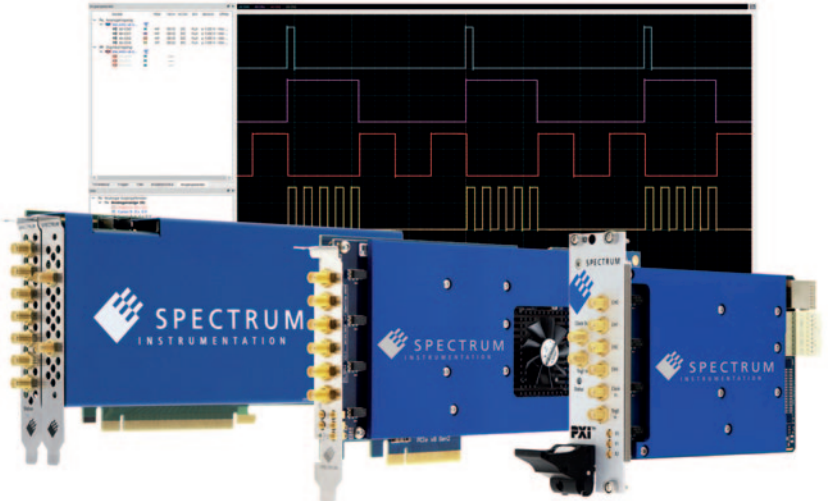

### ► Digital Down Conversion

Our complete line of 48 different PCIe digitizer cards (33xx, 22xx, 44xx, 59xx series) can now perform Digital Down Conversion (DDC). This option is part of the SCAPP package (see page 45) that uses an external GPU-card for continuous “on-the-fly” processing. DDC is a powerful technique that is commonly used in a wide range of communication systems, like digital radio, radar, mobile telephony, space or satellite communications. In the DDC process, RF or Microwave signals are converted to baseband, which contains the signal of interest. The conversion dramatically reduces the resultant data set while also improving signal quality and measurement accuracy.

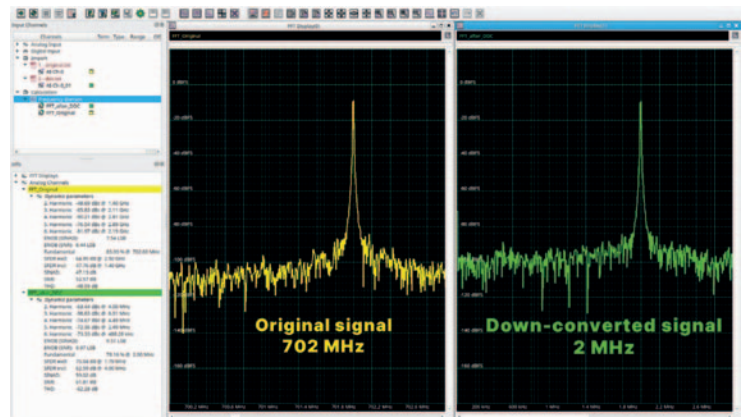

### ► Object-oriented Python package



Python programming made fast & easy for all our 200 test- and measurement products! A new open-source Python package (“spcm”) provides a high-level Object-Oriented Programming (OOP) interface that is specifically designed for all our Digitizer, AWG and Digital I/O products. It includes the full source code as well as a number of detailed examples. Available on GitHub, spcm is free of charge under the MIT license.



## ▶ DDS – Direct Digital Synthesis

DDS generation is available as separate product 96xx and also available for all AWGs of the 66xx series as option. 96xx DDS generators allow a maximum of 50 cores on one output channel while the 66xx option allows up to 20 cores on one channel. Each DDS core (sine wave) can be programmed for frequency, amplitude, phase, frequency slope and amplitude slope. This enables, for example, the control of lasers through AODs and AOMs (as often used in quantum experiments) with just a few simple commands – instead of making large data array calculations. The DDS output can be synchronized with external trigger events or by a programmable timer with a resolution of 6.4 ns.

DDS example with 16 superimposed sine waves on one channel shown in time and frequency domain

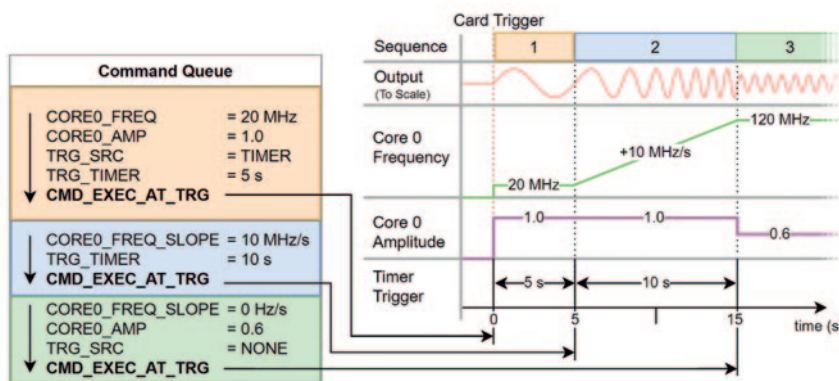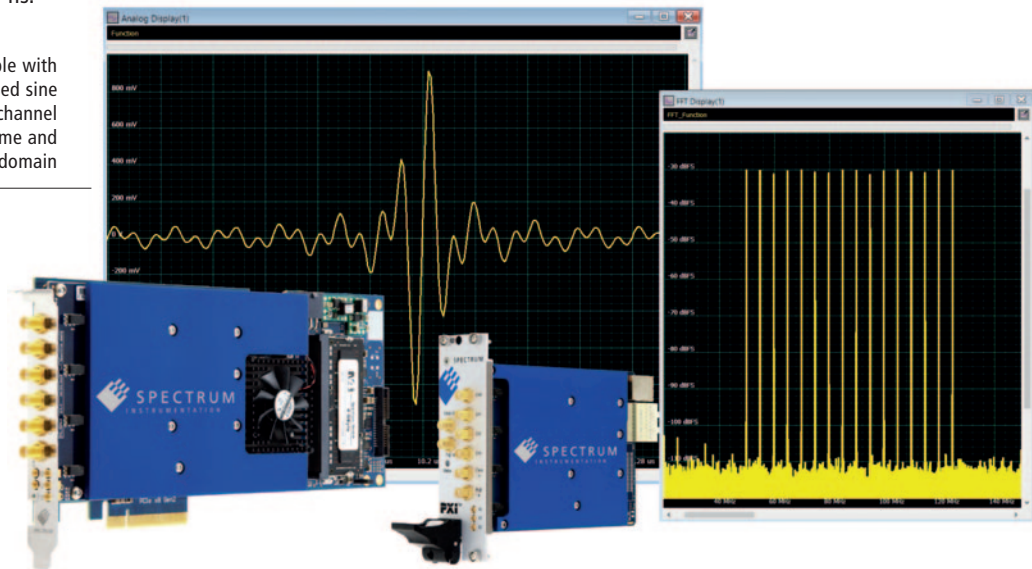


In DDS-mode, only a few commands are needed to e.g. generate a sine wave (orange block), increase the frequency (blue block) and lower the amplitude (green block).

With the ability to switch between the normal AWG mode (which generates waveforms out of pre-programmed data) and the DDS mode (which needs only a few commands to generate sine wave carriers), the 66xx-series AWGs are highly versatile and can be adapted to almost any application. In DDS-mode, the AWG acts as a base for the multi-tone DDS. The units built-in 4 GByte of memory and fast DMA transfer mode then allows the streaming of DDS commands at a rate as high as 10 million commands per second! This unique capability provides the flexibility to perform user-defined slopes (e.g. s-shaped) as well as various modulation types (e.g. FM and AM) with simple, easy-to-use, DDS commands.

### Quantum computer example:

20 DDS sine wave carriers are frequency-shifted to guide laser beams for catching and holding the atoms inside the quantum computer, and allow the atoms to perform the calculation process.

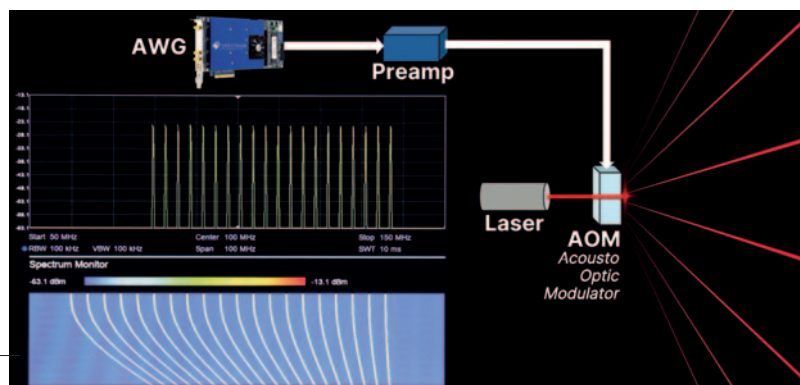

# Digitizers


A digitizer is an electronic acquisition device that acquires analog waveforms, processes them through analog-to-digital converters (ADCs) and sends the digitized sample to a buffer, which allows them to be saved before being processed by a computer.

Today's modular digitizers share a common historical architecture augmented by new high speed serial interface standards such as PCI Express (PCIe) and PXI Express (PXIe).

## Synchronous Sampling

All digitizers from Spectrum are built with a completely synchronous design. Every channel has its own independent input amplifier as well as an independent A/D converter. All the input channel related settings can be individually programmed. Compared with standard products that use multiplex technology, where scanning of each channel is done one after the other with a single A/D converter, the more sophisticated design of the Spectrum products has a lot of advantages:

- Full sampling rate for all channels
- No phase delay between the single channels
- Smallest crosstalk between adjacent channels due to individual input amplifiers
- Direct comparison of acquired values with no need for interpolation

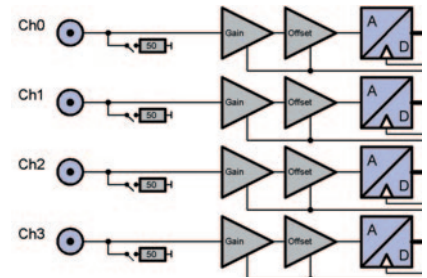

## Digitizer Terms

Selecting a digitizer requires matching the application needs to the digitizer specifications. The following is a glossary of common digitizer specifications and terms:

### Acquisition Memory

Digital data from the ADCs is stored in a high speed buffer memory called the acquisition memory. The depth of the digitizers acquisition memory determines the length of a signal that may be stored in the buffer before it must be transferred for processing, display or saved. Longer memory also allows for a higher sampling rate over extended record times.

### Analog-to-Digital Converter (ADC)

An analog-to-digital converter transforms an analog signal captured by a sampler into digital data that can be processed by a computer.

### Resolution

The resolution of an ADC is specified by the number of bits used to represent the analog value, ideally giving  $2^N$  signal levels for an N-bit signal. Resolution is important for measuring large dynamic signals that contain small signal variations.

### Sampling Rate

The sampling rate, or sample rate, of a digitizer is the frequency at which analog signals are converted to digital data by the analog-to-digital converter. Effective measurement requires the sample rate of a digitizer to be least twice the frequency of the highest signal frequency component. This is called the Nyquist rate. It is preferable to sample slightly higher than Nyquist.

### Bandwidth (-3 dB)

Digitizer bandwidth represents the frequency range that can go through the input stage without significant loss of signal amplitude. Bandwidth is typically measured as the frequency (in Hertz) where the signal amplitude falls to half the power (-3 dB) of the signal at a low frequency.

### Dynamic Range

The digitizers dynamic range determines the maximum and minimum signal voltages that can be measured in one acquisition. A large dynamic range allows for the measurement of signals that contain both small and large voltage components at the same time. Dynamic range is related to the digitizers resolution.


### Memory Segmentation

Fast, repetitive signals are stored on each trigger event as a single segment within the memory. This reduces the required transfer rate and saves memory.



## Transient Capture / Ring Buffer Mode

The standard mode of the digitizer is the ring buffer mode. In this mode data is written into the buffer until a trigger event occurs. After the event additional posttrigger values are recorded enabling both pre- and posttrigger data to be acquired. It is also possible to read the acquired data directly after the trigger event, even while the acquisition is still running.

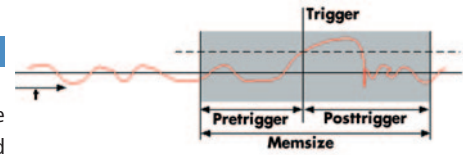


## FIFO Mode

The FIFO mode is designed for continuous data transfer between the digitizer and the PC memory or hard disk. It uses the complete on-board memory as a real FIFO buffer, making the transfer extremely reliable. Data is transferred over the bus by the driver without the need for the user to make any special setup. Spectrum products are designed to reach maximum continuous transfer speeds and can reach up to 3.4 GByte/s on a PCIe x8 Gen2 interface.




## Multiple Recording

Multiple recording allows the acquisition of several trigger events without restarting the hardware. The on-board memory is split into segments and for each trigger event one segment is recorded. The segment size and the pre- and posttrigger settings can be freely defined. The powerful combination of a small re-arming time and FIFO mode makes it easy to adapt to nearly every measurement task.

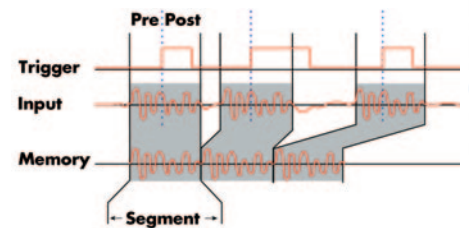

## Gated Sampling

With Gated Sampling the acquisition is controlled by an external gate signal. Data is only acquired if the gate signal has reached a programmed level. Before and after each gate a programmable number of samples will be acquired in addition.

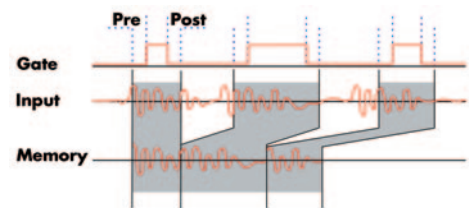


Gated Sampling can be combined with timestamps for time-correct positioning of the gate segments and to determine the length of each acquired gate segment.



## ABA Mode / Dual Timebase



The ABA mode is similar to Multiple Recording. However, between the segments additional samples are acquired with a slower sampling rate, e.g. for monitoring purposes. The ABA mode works like the combination of a data logger and transient recorder inside one instrument.

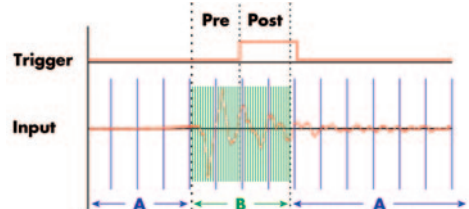

## Timestamp

The Timestamp mode writes the time positions of the trigger events into an extra memory. The Timestamps are relative to the start of recording, to a defined zero time or externally synchronized to the seconds signal from a radio clock or a GPS receiver. With this mode acquisitions of systems in different locations may be set in a precise time relation.

The Timestamp memory is designed as a FIFO buffer allowing the readout of Timestamps also in FIFO mode.

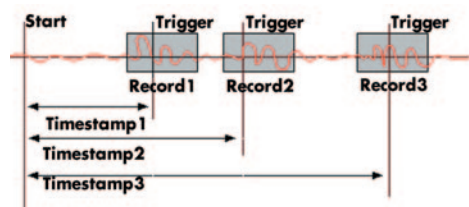

## Integrated Signal Processing

All digitizers of 33xx, 44xx and 22xx series including PCIe, LXI/Ethernet and PXIe versions can be extended by integrated signal processing functions.

The Block Average Processing Module allows the accumulation and averaging of multiple repetitive signals. The function removes random noise from the signal, improving the signal-to-noise ratio and measurement resolution. Ultrafast triggering also ensures the dead-time between each acquisition is kept to a minimum.

The Block Statistics Processing Module is a hardware-based data analysis and reduction function. Each acquisition block is scanned for minimum and maximum peaks and a summary including min, max, average, timestamps and peak position information is stored in memory.


The 44xx series comes with the native Boxcar averaging mode that enhances the high-resolution digitizer and reduces signal noise.

# 33xx Series – High-Speed 12 Bit Digitizers up to 10 GS/s

- One or two channel PCIe x16 Gen3 cards
- Up to 13.9 GB/s streaming speed to PC or GPU
- 50 Ω front-end with 4 input ranges between ±200 mV and ±2.5 V
- Up to 4.7 GHz bandwidth
- Programmable input offset ±100 %
- 1 to 8 GSample memory per channel
- 4 multi-purpose I/O lines (synchronous digital inputs)

## STAR-HUB

This piggy-back module synchronizes up to 8 cards of the M5i.33xx-family. The piggy-back module uses matched and shielded coax cabling and is available with 2, 4 or 8 cables.




## ULTRAFAST STREAMING

All M5i.33xx cards feature a 16 lane Gen3 PCIe bus with up to 13.9 GB/s.



**Fastest Digitizer with 10 GS/s 12 Bit**

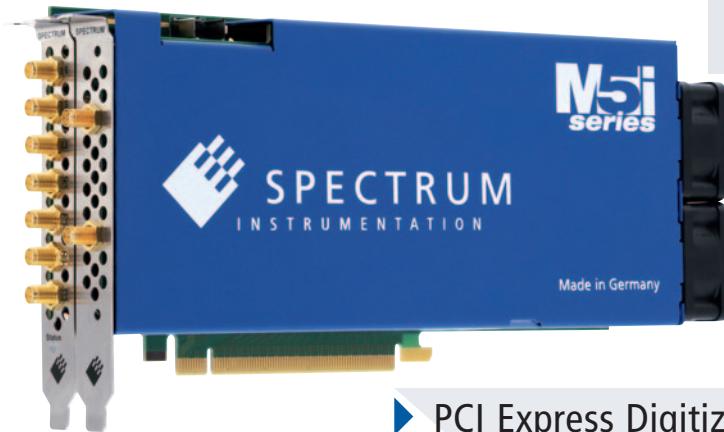

## ▶ PCI Express Digitizer

- PCIe x16 Gen3 Interface
- Up to 13.9 GB/s streaming rate
- ¾ length (241 mm) double-slot fully shielded card
- Integrated cooling fans
- All SMA connections
- SCAPP option for CUDA based calculations

Sampling Rate	Bandwidth	Resolution	2 Channels	1 Channel
10 GS/s	4.7 GHz	12 Bit	M5i.3367-x16 1 x 10 GS/s 2 x 5 GS/s	M5i.3360-x16 1 x 10 GS/s
10 GS/s	3 GHz	12 Bit	M5i.3357-x16 1 x 10 GS/s 2 x 5 GS/s	M5i.3350-x16 1 x 10 GS/s
6.4 GS/s	2 GHz	12 Bit	M5i.3337-x16 1 x 6.4 GS/s 2 x 3.2 GS/s	M5i.3330-x16 1 x 6.4 GS/s
3.2 GS/s	1 GHz	12 Bit	M5i.3321-x16 2 x 3.2 GS/s	

Dual-Use listed products with the need of an export license when exporting outside Europe/US/Canada

## Technical Details

Input Coupling	DC				
Input Impedance	50 Ω				
Input Ranges	±200 mV, ±500 mV, ±1 V, ±2.5 V				
Input Offset:	±100 % of input range, programmable in 1% steps				
		M5i.3330-x16	M5i.3350-x16	M5i.3360-x16	
		M5i.3321-x16 (3.2 GS/s)	M5i.3337-x16 (6.4 GS/s)	M5i.3357-x16 (10 GS/s)	M5i.3367-x16 (10 GS/s)
SNR	10 MHz	55.3 dB	53.8 dB	52.0 dB	51.3 dB
	70 MHz	54.8 dB	53.5 dB	51.7 dB	51.3 dB
	600 MHz	54.9 dB	52.5 dB	51.5 dB	51.3 dB
ENOB	10 MHz	8.8 LSB	8.7 LSB	8.3 LSB	8.2 LSB
	70 MHz	8.8 LSB	8.6 LSB	8.3 LSB	8.2 LSB
	600 MHz	8.8 LSB	8.5 LSB	8.3 LSB	8.1 LSB
RMS Noise		2.3 LSB	2.8 LSB	2.9 LSB	3.8 LSB
Trigger Modes	Channel, External, Software, Window, Re-Arm, Delay, OR/AND, Hold-off				
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Stream to CUDA-GPU (Option), Block Average (Option)				
External Trigger	programmable level ±5 V + 4 LVTTL				
Re-Arming Time	352 samples (1 channel) 176 samples (2 channels)				
Clock Modes	Internal, External Reference				
Sampling Clocks	Any base sampling rate + divider: 1, 2, 4, 8, ... 262144 M5i.3321: Base sampling rate: 3.2 GS/s, 2.5 GS/s, 2.0 GS/s M5i.3330, M5i.3337: Base sampling rate: 6.4 GS/s, 5.0 GS/s, 4.0 GS/s M5i.3350, M5i.3357, M5i.3360, M5i.3367: Base sampling rate: 10.0 GS/s, 8.0 GS/s, 6.4 GS/s				
External Reference Clock	2 MHz to 750 MHz				
External Clock Type	Single-ended, sine or square wave 0.2 V to 3.0 V peak-peak				
Multi-Purpose I/O	Input: Synchronous Digital-In, Asynchronous Digital-In, Timestamp Reference Clock, Trigger Input Output: Asynchronous Digital-Out, Trigger Out, Status, Digital Pulse Generator				

## digitizerNETBOX



### Mobile LXI / Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- DC power supply option available
- Embedded Server option available

Sampling Rate	Bandwidth	Resolution	2 Channels	1 Channel
10 GS/s	4.7 GHz	12 Bit	DN2.336-02 1 x 10 GS/s 2 x 5 GS/s	DN2.336-01 1 x 10 GS/s
10 GS/s	3 GHz	12 Bit	DN2.335-02 1 x 10 GS/s 2 x 5 GS/s	DN2.335-01 1 x 10 GS/s
6.4 GS/s	2 GHz	12 Bit	DN2.333-02 1 x 6.4 GS/s 2 x 3.2 GS/s	DN2.333-01 1 x 6.4 GS/s
3.2 GS/s	1 GHz	12 Bit	DN2.332-02 2 x 3.2 GS/s	

Dual-Use listed products with the need of an export license when exporting outside Europe/US/Canada

# 22xx Series – Ultra High-Speed 8 Bit Digitizers up to 5 GS/s .....

- One, two or four channel PCIe and PXIe card versions
- Two to 24 channel LXI/Ethernet versions
- 50 Ω high bandwidth front-end with 4 input ranges between ±200 mV and ±2.5 V
- Low voltage option: ±40 mV to ±500 mV
- Programmable input offset ±200%
- 1 to 4 GSample memory per channel
- Firmware options Block Average and Block Statistics available
- 3 multi-purpose I/O lines

### STAR-HUB

This piggy-back module synchronizes up to 8 cards of the M4i.22xx-family. Top mount (TM) version with 2 slots width or Extension (EX) version with 1 slots width and 312 mm length are available.



DIGITIZERS

22



## M4i series



### ▶ PCI Express Digitizer

- PCIe x8 Gen2 Interface
- Up to 3.4 GByte/s streaming rate
- Star-Hub for internal synchronization up to 8 cards
- ¾ length (241 mm) single-slot card
- SMA and MMCX connections
- SCAPP option for CUDA based calculations

## M4x series



### ▶ PXI Express Digitizer

- PCIe x4 Gen2 Interface
- Up to 1.7 GByte/s streaming rate
- 3U double-width card
- PXIe reference clock supported
- PXIe trigger bus and star trigger supported
- SMA and MMCX connections

Sampling Rate	Bandwidth	Resolution	PCI Express Digitizer			PXI Express Digitizer	
			4 Channels	2 Channels	1 Channel	4 Channels	2 Channels
1.25 GS/s	500 MHz	8 Bit	M4i.2212-x8 4 x 1.25 GS/s	M4i.2211-x8 2 x 1.25 GS/s	M4i.2210-x8 1 x 1.25 GS/s	M4x.2212-x4 4 x 1.25 GS/s	M4x.2211-x4 2 x 1.25 GS/s
2.5 GS/s	1.5 GHz	8 Bit		M4i.2221-x8 2 x 2.5 GS/s	M4i.2223-x8 1 x 2.5 GS/s 2 x 1.25 GS/s	M4i.2220-x8 1 x 2.5 GS/s	M4x.2221-x4 2 x 2.5 GS/s
5 GS/s	1.5 GHz	8 Bit	M4i.2234-x8 1 x 5 GS/s 2 x 2.5 GS/s 4 x 1.25 GS/s	M4i.2233-x8 1 x 5 GS/s 2 x 2.5 GS/s	M4i.2230-x8 1 x 5 GS/s	M4x.2234-x4 1 x 5 GS/s 2 x 2.5 GS/s 4 x 1.25 GS/s	

## Technical Details

Input Coupling	AC/DC
Input Impedance	50 Ω
Input Ranges (Standard)	±200 mV, ±500 mV, ±1 V, ±2.5 V
Input Ranges (Option)	±40 mV, ±100 mV, ±200 mV, ±500 mV
Input Offset:	±200 % of input range, programmable in 1% steps
SNR (10 MHz signal)	46.9 dB (1.25 GS/s)
	45.6 dB (2.5 GS/s)
	44.5 dB (5 GS/s)
ENOB (10 MHz signal)	7.5 (1.25 GS/s)
	7.3 (2.5 GS/s)
	7.1 (5 GS/s)
RMS Noise	0.2 LSB (1.25 GS/s)
	0.3 LSB (2.5 GS/s)
	0.3 LSB (5 GS/s)
Trigger Modes	Channel, External, Software, Window, Re-Arm, Delay, OR/AND
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Gated Sampling, ABA Mode, Block Average (Option), Block Statistics (Option), Stream to CUDA-GPU (Option, PCIe only)
External Trigger	2 Inputs, programmable level ±10 V, 200 MHz
Re-Arming Time	80 samples (1.25 GS/s)
	160 samples (2.5 GS/s)
	320 samples (5 GS/s)
Clock Modes	Internal, External Reference
Sampling Clocks	Maximum sampling rate + divider: 1, 2, 4, 8, ... 262144
External Reference Clock	10 MHz to 1.25 GHz
External Clock Type	Single-ended, sine or square wave 0.3 V (square) or 1 V (sine) to 3.0 V peak-peak
Multi-Purpose I/O	Input: Synchronous Digital-In, Asynchronous Digital-In, Timestamp Reference Clock Output: Asynchronous Digital-Out, Trigger Out, Status, PLL Reference Clock, System Clock, Digital Pulse Generator

## digitizerNETBOX



### Mobile LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- DC power supply option available
- Embedded Server option available

### 19" LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- Embedded Server option available

2 Channels	1 Channel	8 Channels	4 Channels	2 Channels	24 Channels	20 Channels	16 Channels	12 Channels
	M4x.2210-x4 1 x 1.25 GS/s	DN2.221-08 8 x 1.25 GS/s	DN2.221-04 4 x 1.25 GS/s	DN2.221-02 2 x 1.25 GS/s	DN6.221-24 24 x 1.25 GS/s	DN6.221-20 20 x 1.25 GS/s	DN6.221-16 16 x 1.25 GS/s	DN6.221-12 12 x 1.25 GS/s
M4x.2223-x4 1 x 2.5 GS/s 2 x 1.25 GS/s	M4x.2220-x4 1 x 2.5 GS/s		DN2.222-04 4 x 2.5 GS/s	DN2.222-02 2 x 2.5 GS/s				
M4x.2233-x4 1 x 5 GS/s 2 x 2.5 GS/s	M4x.2230-x4 1 x 5 GS/s	DN2.225-08 2 x 5 GS/s 4 x 2.5 GS/s 8 x 1.25 GS/s	DN2.225-04 1 x 5 GS/s 2 x 2.5 GS/s 4 x 1.25 GS/s	DN2.223-02 2 x 5 GS/s	DN6.225-24 6 x 5 GS/s 12 x 2.5 GS/s 24 x 1.25 GS/s	DN6.225-20 5 x 5 GS/s 10 x 2.5 GS/s 20 x 1.25 GS/s	DN6.225-16 4 x 5 GS/s 8 x 2.5 GS/s 16 x 1.25 GS/s	DN6.225-12 3 x 5 GS/s 6 x 2.5 GS/s 12 x 1.25 GS/s


Dual-Use listed products with the need of an export license when exporting outside Europe/US/Canada

# 44xx Series – High-Resolution High-Speed Digitizers up to 500 MS/s ...

- One, two or four channel PCIe and PXIe card versions
- Two to 24 channel LXI/Ethernet versions
- 50 Ω / 1 MΩ front-end with 6 input ranges between ±200 mV and ±10 V
- Input ranges switchable between bipolar and unipolar
- 512 MSamples to 2 GSamples memory per channel
- Boxcar Average (high-resolution) mode to increase resolution
- Firmware options Block Average and Block Statistics available
- 3 multi-purpose I/O lines

## STAR-HUB

This piggy-back module synchronizes up to 8 cards of the M4i.44xx-family. Top mount (TM) version with 2 slots width or Extension (EX) version with 1 slots width and 312 mm length are available.



## DIGITAL OPTION




This piggy-back module adds 8 fully synchronous digital inputs to the analog inputs of the M4i.44xx-digitizers.

**Fastest 14 Bit Digitizer with 500 MS/s**

DIGITIZERS

24

**M4i**  
series

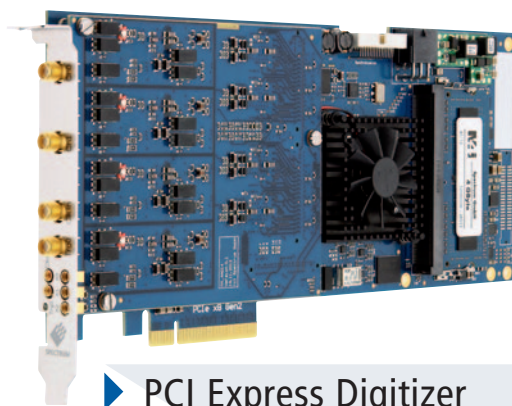

## ▶ PCI Express Digitizer

- PCIe x8 Gen2 Interface
- Up to 3.4 GByte/s streaming rate
- Star-Hub for internal synchronization up to 8 cards
- ¾ length (241 mm) single-slot card
- SMA and MMCX connections
- SCAPP option for CUDA-based calculations

**M4x**  
series



## ▶ PXI Express Digitizer

- PCIe x4 Gen2 Interface
- Up to 1.7 GByte/s streaming rate
- 3U double-width card
- PXIe reference clock supported
- PXIe trigger bus and star trigger supported
- SMA and MMCX connections

Sampling Rate	Bandwidth	Resolution	M4i series		M4x series	
			4 Channels	2 Channels	4 Channels	2 Channels
180 MS/s	125 MHz (HF)	16 Bit	M4i.4471-x8	M4i.4470-x8	M4x.4471-x4	M4x.4470-x4
	85 MHz (Buffered)		4 x 180 MS/s	2 x 180 MS/s	4 x 180 MS/s	2 x 180 MS/s
250 MS/s	125 MHz (HF)	16 Bit	M4i.4421-x8	M4i.4420-x8	M4x.4421-x4	M4x.4420-x4
	85 MHz (Buffered)		4 x 250 MS/s	2 x 250 MS/s	4 x 250 MS/s	2 x 250 MS/s
400 MS/s	250 MHz (HF)	14 Bit	M4i.4481-x8	M4i.4480-x8	M4x.4481-x4	M4x.4480-x4
	125 MHz (Buffered)		4 x 400 MS/s	2 x 400 MS/s	4 x 400 MS/s	2 x 400 MS/s
500 MS/s	250 MHz (HF)	14 Bit	M4i.4451-x8	M4i.4450-x8	M4x.4451-x4	M4x.4450-x4
	125 MHz (Buffered)		4 x 500 MS/s	2 x 500 MS/s	4 x 500 MS/s	2 x 500 MS/s

## Technical Details

Input Coupling	AC/DC
Input Impedance	50 Ω (HF Path) / 1 MΩ (Buffered Path)
Input Ranges (HF Path)	±500 mV, ±1 V, ±2.5 V, ±5 V
Input Ranges (Buffered)	±200 mV, ±500 mV, ±1 V, ±2 V, ±5 V, ±10 V
SNR (10 MHz signal)	67.8 dB (500 MS/s, 400 MS/s)
	71.5 dB (250 MS/s, 180 MS/s)
	71.8 dB (130 MS/s)
ENOB (10 MHz signal)	11.0 (500 MS/s, 400 MS/s)
	11.6 (250 MS/s, 180 MS/s)
	11.6 (130 MS/s)
RMS Noise (HF Path)	1.9 LSB (500 MS/s, 400 MS/s)
	6.9 LSB (250 MS/s, 180 MS/s)
	5.9 LSB (130 MS/s)
Trigger Modes	Channel, External, Software, Window, Re-Arm, Delay, OR/AND
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Gated Sampling, ABA Mode, Boxcar-Average, Block Average (Option), Block Statistics (Option), Stream to CUDA-GPU (Option, PCIe only)
External Trigger	2 Inputs, programmable level ±10 V, 200 MHz
Re-Arming Time	40 samples
Clock Modes	Internal + Divider, Internal Special Clock, External Reference
Special Clock Granularity	1 Hz
External Reference Clock	10 MHz to 1.0 GHz
External Clock Type	Single-ended, sine or square wave 0.3 V (square) or 1 V (sine) to 3.0 V peak-peak
Multi-Purpose I/O	Input: Synchronous Digital-In, Asynchronous Digital-In, Timestamp Reference Clock Output: Asynchronous Digital-Out, Trigger Out, Status, PLL Reference Clock, System Clock, Digital Pulse Generator

## digitizerNETBOX



### ▶ Mobile LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- DC power supply option available
- Embedded Server option available

### ▶ 19" LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- Embedded Server option available

Mobile LXI/Ethernet digitizerNETBOX			19" LXI/Ethernet digitizerNETBOX			
8 Channels	4 Channels	2 Channels	24 Channels	20 Channels	16 Channels	12 Channels
DN2.447-08 8 x 180 MS/s	DN2.447-04 4 x 180 MS/s	DN2.447-02 2 x 180 MS/s	DN6.447-24 24 x 180 MS/s	DN6.447-20 20 x 180 MS/s	DN6.447-16 16 x 180 MS/s	DN6.447-12 12 x 180 MS/s
DN2.442-08 8 x 250 MS/s	DN2.442-04 4 x 250 MS/s	DN2.442-02 2 x 250 MS/s	DN6.442-24 24 x 250 MS/s	DN6.442-20 20 x 250 MS/s	DN6.442-16 16 x 250 MS/s	DN6.442-12 12 x 250 MS/s
DN2.448-08 8 x 400 MS/s	DN2.448-04 4 x 400 MS/s	DN2.448-02 2 x 400 MS/s	DN6.448-24 24 x 400 MS/s	DN6.448-20 20 x 400 MS/s	DN6.448-16 16 x 400 MS/s	DN6.448-12 12 x 400 MS/s
DN2.445-08 8 x 500 MS/s	DN2.445-04 4 x 500 MS/s	DN2.445-02 2 x 500 MS/s	DN6.445-24 24 x 500 MS/s	DN6.445-20 20 x 500 MS/s	DN6.445-16 16 x 500 MS/s	DN6.445-12 12 x 500 MS/s


Dual-Use listed products with the need of an export license when exporting outside Europe/US/Canada

# 59xx Series – 16 Bit General Purpose Digitizers up to 125 MS/s .....

- One, two, four or eight channel PCIe card versions
- Four to 48 channel LXI/Ethernet versions
- Inputs switchable between single-ended and differential
- 50 Ω / 1 MΩ front-end with 6 input ranges between ±200 mV and ±10 V
- Input ranges switchable between bipolar and unipolar
- 64 MSamples to 512 MSamples memory per channel
- 20 (4 standard + 16 as option) multi-purpose I/O

## STAR-HUB

This piggy-back module synchronizes multiple cards of the whole M2p-family (digitizers, AWGs and Digital I/O). The star-hub is available for 6 cards or 16 cards and can either be ordered as top mount (TM) version with two slots width or as Extension (EX) version with 1 slot width and 245 mm length.





## DIGITAL OPTION

This piggy-back module adds 16 additional digital lines to the 4 multi-purpose I/O lines that are already standard on the cards. It allows a single 59xx card to run as a mixed mode device with 8 analog channels and 19 synchronous digital input channels. The module is available in two different versions, one with SMB connectors and one with an FX2 flat-ribbon connector.



DIGITIZERS

26

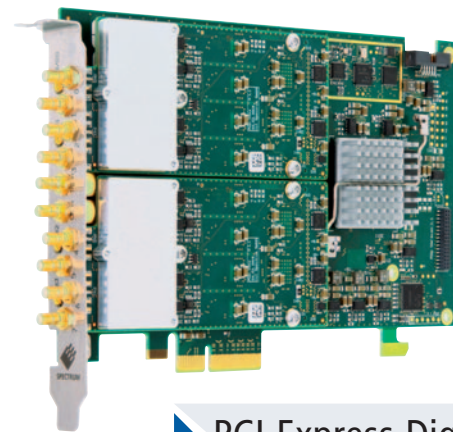

**M2p**  
series

## ▶ PCI Express Digitizer

- PCIe x4 Gen1 Interface
- More than 700 MByte/s streaming rate
- Star-Hub for internal synchronization up to 16 cards
- ½ length (168 mm) single-slot card
- SMB and MMCX connections
- SCAPP option for CUDA-based calculations

Sampling Rate	Bandwidth	Resolution
5 MS/s	2.5 MHz	16 Bit
20 MS/s	10 MHz	16 Bit
40 MS/s	20 MHz	16 Bit
80 MS/s	40 MHz	16 Bit
125 MS/s	60 MHz	16 Bit

8 Channels	4 Channels	2 Channels	1 Channel
M2p.5913-x4 8 x 5 MS/s SE 4 x 5 MS/s Diff	M2p.5916-x4 4 x 5 MS/s SE 4 x 5 MS/s Diff	M2p.5912-x4 4 x 5 MS/s SE 2 x 5 MS/s Diff	M2p.5911-x4 2 x 5 MS/s SE 2 x 5 MS/s Diff
M2p.5923-x4 8 x 20 MS/s SE 4 x 20 MS/s Diff	M2p.5926-x4 4 x 20 MS/s SE 4 x 20 MS/s Diff	M2p.5922-x4 4 x 20 MS/s SE 2 x 20 MS/s Diff	M2p.5921-x4 2 x 20 MS/s SE 2 x 20 MS/s Diff
M2p.5933-x4 8 x 40 MS/s SE 4 x 40 MS/s Diff	M2p.5936-x4 4 x 40 MS/s SE 4 x 40 MS/s Diff	M2p.5932-x4 4 x 40 MS/s SE 2 x 40 MS/s Diff	M2p.5931-x4 2 x 40 MS/s SE 2 x 40 MS/s Diff
M2p.5943-x4 8 x 80 MS/s SE 4 x 80 MS/s Diff	M2p.5946-x4 4 x 80 MS/s SE 4 x 80 MS/s Diff	M2p.5942-x4 4 x 80 MS/s SE 2 x 80 MS/s Diff	M2p.5941-x4 2 x 80 MS/s SE 2 x 80 MS/s Diff
M2p.5968-x4 4 x 125 MS/s SE 4 x 125 MS/s Diff 8 x 80 MS/s SE	M2p.5966-x4 4 x 125 MS/s SE 4 x 125 MS/s Diff	M2p.5962-x4 4 x 125 MS/s SE 2 x 125 MS/s Diff	M2p.5961-x4 2 x 125 MS/s SE 2 x 125 MS/s Diff
			M2p.5940-x4 1 x 80 MS/s SE 1 x 80 MS/s Diff
			M2p.5960-x4 1 x 125 MS/s SE 1 x 125 MS/s Diff

SE = Single-Ended Inputs  
Diff = Differential Inputs (non-isolated)

## Technical Details

Input Type	Single-Ended or True Differential (non-isolated)				
Input Impedance	50 Ω/1 MΩ				
Input Ranges	±200 mV, ±500 mV, ±1 V, ±2 V, ±5 V, ±10 V				
Input Offset (single-ended)	±100%				
	591x (5 MS/s)	592x (20 MS/s)	593x (40 MS/s)	594x (80 MS/s)	596x (125 MS/s)
SNR (1 MHz signal)	86.0 dB	81.0 dB	75.3 dB	74.2 dB	73.3 dB
ENOB (1 MHz signal)	14.0 LSB	13.2 LSB	12.2 LSB	12.0 LSB	11.8 LSB
Trigger Modes	Channel, External, Software, Window, Re-Arm, Delay, OR/AND, Pulse, Hold-off				
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Gated Sampling, ABA Mode, Stream to CUDA-GPU (Option, PCIe only)				
External Trigger	1 with programmable level ±5 V, 3 additional LVTTTL				
Clock Modes	Internal, Direct External Clock, External Reference Clock				
Sampling Clocks	1 kS/s up to maximum sampling clock				
External Reference Clock	128 kHz to 125 MHz				
External Clock Type	Single-ended, sine or square wave with programmable level ±5 V				
Multi-Purpose I/O	Input: Synchronous Digital-In, Asynchronous Digital-In, Timestamp Reference Clock, Trigger Output: Asynchronous Digital-Out, Trigger Out, Status, ADC Clock, Digital Pulse Generator				

# digitizerNETBOX



### ▶ Mobile LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections BNC
- DC power supply option available
- Embedded Server option available

### ▶ 19" LXI/Ethernet digitizerNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections BNC
- Embedded Server option available

16 Channels	8 Channels	4 Channels
DN2.591-16 16 x 5 MS/s SE 8 x 5 MS/s Diff	DN2.591-08 8 x 5 MS/s SE 4 x 5 MS/s Diff	DN2.591-04 4 x 5 MS/s SE 4 x 5 MS/s Diff
DN2.592-16 16 x 20 MS/s SE 8 x 20 MS/s Diff	DN2.592-08 8 x 20 MS/s SE 4 x 20 MS/s Diff	DN2.592-04 4 x 20 MS/s SE 4 x 20 MS/s Diff
DN2.593-16 16 x 40 MS/s SE 8 x 40 MS/s Diff	DN2.593-08 8 x 40 MS/s SE 4 x 40 MS/s Diff	DN2.593-04 4 x 40 MS/s SE 4 x 40 MS/s Diff
DN2.596-16 8 x 125 MS/s SE 8 x 125 MS/s Diff 16 x 80 MS/s SE	DN2.596-08 4 x 125 MS/s SE 4 x 125 MS/s Diff 8 x 80 MS/s SE	DN2.596-04 4 x 125 MS/s SE 4 x 125 MS/s Diff 4 x 125 MS/s Diff


48 Channels	40 Channels	32 Channels	24 Channels
DN6.591-48 48 x 5 MS/s SE 24 x 5 MS/s Diff	DN6.591-40 40 x 5 MS/s SE 20 x 5 MS/s Diff	DN6.591-32 32 x 5 MS/s SE 16 x 5 MS/s Diff	DN6.591-24 24 x 5 MS/s SE 12 x 5 MS/s Diff
DN6.592-48 48 x 20 MS/s SE 24 x 20 MS/s Diff	DN6.592-40 40 x 20 MS/s SE 20 x 20 MS/s Diff	DN6.592-32 32 x 20 MS/s SE 16 x 20 MS/s Diff	DN6.592-24 24 x 20 MS/s SE 12 x 20 MS/s Diff
DN6.593-48 48 x 40 MS/s SE 24 x 40 MS/s Diff	DN6.593-40 40 x 40 MS/s SE 20 x 40 MS/s Diff	DN6.593-32 32 x 40 MS/s SE 16 x 40 MS/s Diff	DN6.593-24 24 x 40 MS/s SE 12 x 40 MS/s Diff
DN6.596-48 24 x 125 MS/s SE 24 x 125 MS/s Diff 48 x 80 MS/s Diff	DN6.596-40 20 x 125 MS/s SE 20 x 125 MS/s Diff 40 x 80 MS/s SE	DN6.596-32 16 x 125 MS/s SE 16 x 125 MS/s Diff 32 x 80 MS/s SE	DN6.596-24 12 x 125 MS/s SE 12 x 125 MS/s Diff 24 x 80 MS/s SE

DIGITAL OPTION available: 8 analog + 11 additional digital channels

# Arbitrary Waveform Generators

Electronic test and measurements equipment can be classified into two major categories; measurement instruments and signal sources. Instruments such as digital multi-meters, digitizers, oscilloscopes, spectrum analyzers, and logic analyzers measure electrical characteristics of an input signal, most typically electrical potential difference or voltage. Signal sources, such as Arbitrary Waveform Generators (AWGs), are often required to provide a test stimulus, where the devices being tested do not generate signals on their own.

Arbitrary waveform generators (AWGs) are analog signal sources that operate very much like a digitizer in reverse. Where a digitizer samples an analog waveform, digitizes it and then stores it in its acquisition memory, the AWG has a numeric description of the waveform stored in waveform memory. Selected samples of the waveform are sent to a digital to analog converter (DAC) and then, with appropriate filtering and signal conditioning, are output as an analog waveform.

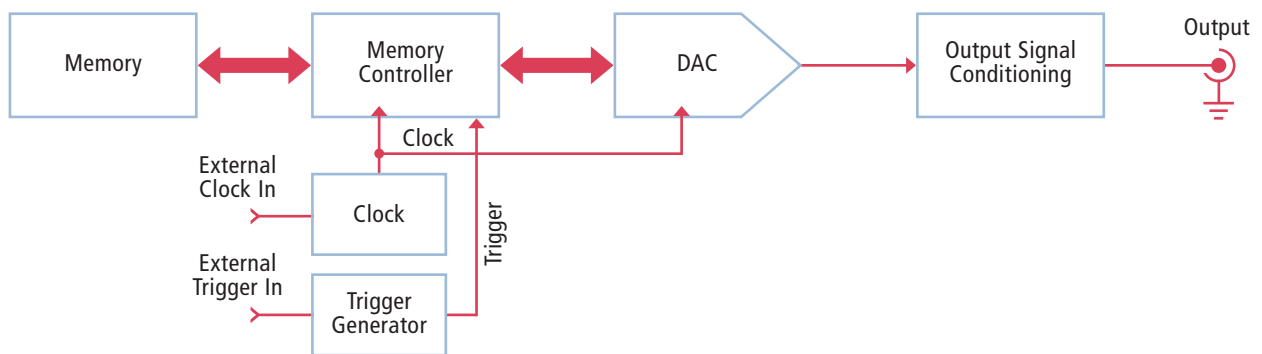

## Arbitrary Waveform Generator Terms

The specifications for an arbitrary waveform generator are quite different from standard signal generators. That is due to the great flexibility in the output waveform selection and the digital nature of the AWG.

### Bandwidth, Sampling Rate and Maximum Output Frequency

The key parameters, like with digitizers, are bandwidth and sampling rate. The bandwidth determines the highest sine wave frequency that the AWG can output with a loss less than 3 dB. Since many of the waveforms that can be created by the AWG are harmonic rich the bandwidth limit will determine the highest frequency waveform that can be generated. For example, a square wave generally has to be able to pass the fifth harmonic to be recognizable. For a given bandwidth the highest frequency square wave is one fifth the AWG bandwidth.

The sampling rate is related to the bandwidth. According to sampling theory the sampling rate has to be at least twice the bandwidth. With a fixed maximum bandwidth increasing the sampling rate does not improve the maximum bandwidth. The sampling rate also determines the horizontal resolution of the AWG. This defines the smallest time increment that can be set within the waveforms.

### Memory Depth

The size of the waveform memory determines the longest waveform that can be output without repeating (looping) any waveform components. The limit of signal duration, without looping, is memory length times the sample period. The use of looping to repeat redundant waveform components without taking any extra memory space can greatly increase the maximum waveform length.

Modular AWGs with First-In First-Out (FIFO) streaming mode can further extend waveforms by utilizing the memory of their host computer. For example, the Spectrum M4i.66xx series products can stream data at speeds of up to 2.8 GBytes/s from the host PC to the AWG using the AWG's internal memory as a high-speed buffer. This frees the AWG from the memory limits of the internal memory. Combining FIFO streaming with looping and linking functions enables the generation of an unprecedented variety of long waveforms.

### Amplitude Resolution

Amplitude resolution specifies the minimum output signal level the AWG can generate and the minimum amplitude step between adjacent samples. The amplitude resolution of the AWG is determined by the number of bits of the DAC. In general, there is a trade-off between DAC resolution and sampling rate. That is the greater the number of bits in the DAC the lower the maximum sampling rate.

AWGs may incorporate multiple operating modes that determine how the stored waveforms are replayed. The ability to repeat (loop) selected segments of the waveform and advance between segments based on triggers or gating signals provides the ultimate flexibility and reduces the amount of memory required for complex waveforms. Here is a summary of common operating modes:


### Singleshot

The programmed waveform is played once after receiving a trigger event be it external or software. After the first trigger subsequent triggers are ignored.



### Repeated Output

The programmed waveform is played continuously for a pre-programmed number of times or until a stop command is executed. The trigger source can be either an external trigger inputs or the software trigger. After the first trigger additional trigger events are ignored.

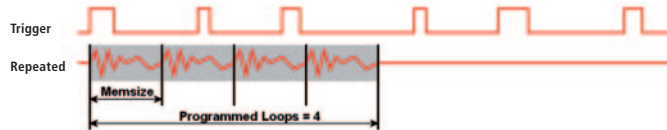

### Single Restart Replay

This mode outputs the waveform data of the on-board memory once after each trigger event. The trigger source can be either an external trigger or the internal software trigger.




### FIFO

The FIFO mode is an operating mode unique to Spectrum's modular AWGs. It is designed for continuous data transfer between the host computers memory or hard disk and the AWG. The complete installed on-board memory is used for buffering data, making the continuous streaming extremely reliable.




### Multiple Replay

The Multiple Replay mode provides fast output of waveforms on multiple trigger events without restarting the hardware. The on-board memory is divided into several equal size segments that can contain different waveform data. This mode allows very fast repetition rates.

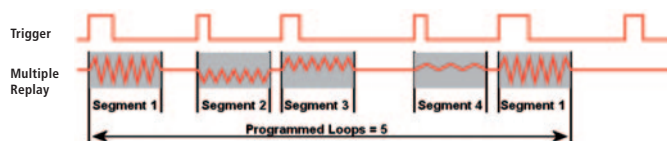

### Gated Replay

The Gated Replay sampling mode outputs waveform data controlled by an external gate signal. Data is only replayed if the gate signal is at a pre-programmed level.



### Sequence Replay Mode

The sequence mode splits the internal card memory into a number of data segments of different lengths. These data segments are chained in a user set order using an additional sequence memory. The sequence memory determines the order that segments are output as well as the number of loops for each segment. Trigger conditions can be defined to advance from segment to segment. Using sequence mode it is possible to switch between replay waveforms by a simple software command or to redefine waveform data for segments simultaneously while other segments are being replayed.

# 63xx Series – 16 Bit High-Speed Arbitrary Waveform Generators up

- Fast 16 bit arbitrary waveform generator
- 1 or 2 channel versions
- Separate DAC and amplifier per channel
- Output level programmable up to  $\pm 500$  mV single-ended into 50 Ohm
- Output level programmable up to  $\pm 1.0$  V differential into 50 Ohm
- Modes: Single-Shot, Loop, FIFO, Multiple Replay, ...
- Up to 8 GSample on-board memory
- Direct data transfer from CUDA GPU using SCAPP option

Fastest AWG with 16 Bit 10 GS/s



## PCI Express AWG

- PCIe x16 Gen3 Interface
- Up to 10 GB/s streaming rate
- ¾ length (241 mm) double-slot fully shielded card
- Integrated cooling fans
- All SMA connections
- SCAPP option for CUDA based calculations

### STAR-HUB

This piggy-back module synchronizes up to 8 cards of the M5i.63xx-family. The piggy-back module uses matched and shielded coax cabling and is available with 2, 4 or 8 cables.



### ULTRAFAST STREAMING

All M5i.63xx cards feature a 16 lane Gen3 PCIe bus with up to 10.0 GB/s.



Sampling Rate	Bandwidth	Output Level	Resolution	2 Channels	1 Channels
10 GS/s	3.9 GHz	$\pm 1$ V Diff $\pm 500$ mV SE	16 Bit	M5i.6367-x16 1 x 10 GS/s 2 x 5 GS/s	M5i.6360-x16 1 x 10 GS/s
10 GS/s	2.5 GHz	$\pm 1$ V Diff $\pm 500$ mV SE	16 Bit	M5i.6357-x16 1 x 10 GS/s 2 x 5 GS/s	M5i.6350-x16 1 x 10 GS/s
3.2 GS/s	1.4 GHz	$\pm 1$ V Diff $\pm 500$ mV SE	16 Bit	M5i.6321-x16 1 x 3.2 GS/s 2 x 3.2 GS/s	M5i.6320-x16 1 x 3.2 GS/s

to 10 GS/s

## Technical Details

DAC Type	16 Bit, non-interpolating		
Output Mode	Software programmable	Single-ended or Differential	
Output Enable/Disable	Software programmable	Output disable cuts connection to DCA and terminated connector wirh 50Ω to GND	
<b>Single-ended</b>		<b>Into 50Ω</b>	<b>Into high impedance</b>
Output Amplitude	Software programmable	±1 mV up to ±500 mV	±2 mV up to ±1 V
Output Offset	Software programmable	±500 mV	±1 V
<b>Differential</b>		<b>Into 100Ω</b>	<b>Into high impedance</b>
Output Amplitude	Software programmable	±2 mV up to ±1 V	±4 mV up to ±2 V
Common Mode Voltage	Software programmable	±500 mV	±1 V
20% to 80% rise/fall time step response		240ps	240 ps
Trigger Modes	External, Software, Delay, OR/AND, Hold-off		
Replay Modes	Single-Shot, FIFO, Multiple Replay, Stream from CUDA-GPU (Option)		
External Trigger	programmable level ±5 V + 4 LVTTTL		
Clock Modes	Internal, External Reference		
External Reference Clock	2 MHz to 750 MHz		
External Clock Type	Single-ended, sine or square wave 0.2 V to 3.0 V peak-peak		
Multi-Purpose I/O	Input: Asynchronous Digital-In, Trigger Input Output: Synchronous Digital-Out, Asynchronous Digital-Out, Trigger Out, Status, Digital Pulse Generator Option		

# generatorNETBOX



### ▶ Mobile LXI/Ethernet generatorNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- DC power supply option available
- Embedded Server option available

Sampling Rate	Bandwidth	Output Level	Resolution	2 Channels	1 Channels
10 GS/s	3.9 GHz	±1 V Diff ±500 mV SE	16 Bit	DN2.636-02 1 x 10 GS/s 2 x 5 GS/s	DN2.636-01 1 x 10 GS/s
10 GS/s	2.5 GHz	±1 V Diff ±500 mV SE	16 Bit	DN2.635-02 1 x 10 GS/s 2 x 5 GS/s	DN2.635-01 1 x 10 GS/s
3.2 GS/s	1.4 GHz	±1 V Diff ±500 mV SE	16 Bit	DN2.632-02 1 x 3.2 GS/s 2 x 3.2 GS/s	DN2.632-01 1 x 3.2 GS/s

# 66xx Series – 16 Bit High-Speed Arbitrary Waveform Generators up


ARBITRARY WAVEFORM GENERATORS

- One, two or four channel PCIe and PXIe card versions
- Two to 24 channel LXI/Ethernet versions
- Output level up to  $\pm 2.5$  V into 50  $\Omega$
- Bandwidth up to 400 MHz (600 MHz as option)
- Fixed trigger to output delay
- 512 MSamples to 2 GSamples memory per channel
- Fast FIFO streaming mode included
- Sequence Replay mode
- 3 multi-purpose I/O lines



### STAR-HUB

This piggy-back module synchronizes up to 8 cards of the M4i.66xx-family. Top mount (TM) version with 2 slots width or Extension (EX) version with 1 slots width and 312 mm length are available.



**M4i**  
series



### ▶ PCI Express AWG

- PCIe x8 Gen2 Interface
- Up to 2.8 GByte/s streaming rate
- Star-Hub for internal synchronization up to 8 cards
- ¾ length (241 mm) single-slot card
- SMA and MMCX connections
- SCAPP option for CUDA-based data generation

**M4x**  
series



### ▶ PXI Express AWG

- PCIe x4 Gen2 Interface
- Up to 1.4 GByte/s streaming rate
- 3U double-width card
- PXIe reference clock supported
- PXIe trigger bus and star-trigger supported
- SMA and MMCX connections

Sampling Rate	Bandwidth	Output Level	Resolution
625 MS/s	200 MHz	$\pm 2.5$ V	16 Bit
1.25 GS/s	400 MHz 320 MHz	$\pm 480$ mV $\pm 2.0$ V	16 Bit

4 Channels	2 Channels	1 Channel
M4i.6622-x8 4 x 625 MS/s	M4i.6621-x8 2 x 625 MS/s	M4i.6620-x8 1 x 625 MS/s
	M4i.6631-x8 2 x 1.25 GS/s	M4i.6630-x8 1 x 1.25 GS/s

4 Channels	2 Channels	1 Channel
M4x.6622-x4 4 x 625 MS/s	M4x.6621-x4 2 x 625 MS/s	M4x.6620-x4 1 x 625 MS/s
	M4x.6631-x4 2 x 1.25 GS/s	M4x.6630-x4 1 x 1.25 GS/s

to 1.25 GS/s

## Technical Details

DAC Type	16 Bit, non-interpolating
Output Impedance	50 Ω
Output Level in 50 Ω	±2.5 V (625 MS/s) ±2.0 V (1.25 GS/s)
Marker Outputs	3 free programmable 1 loop marker
SNR (10 MHz signal)	72.1 dB (1.25 GS/s, ±1 V) 72.4 dB (625 MS/s, ±1 V)
ENOB (10 MHz signal)	11.5 dB (1.25 GS/s, ±1 V) 11.7 dB (625 MS/s, ±1 V)
NSD	-149 dBm/Hz (1.25 GS/s, ±1 V) -149 dBm/Hz (625 MS/s, ±1 V)
Trigger Modes	External, Software, Window, Re-Arm, Delay, OR/AND
Replay Modes	Single-Shot, FIFO, Multiple Replay, Gated Replay, Sequence Replay Mode, Stream from CUDA-GPU (Option, PCIe only)
External Trigger	2 Inputs, programmable level ±10 V
Sequence Replay Mode	Up to 4k sequence steps Up to 64k segments Up to 1M loops Loop until Trigger Data and sequence steps overload at runtime
Trigger to Output Delay	238.5 Sample Clocks + 16 ns (625 MS/s) 476.5 Sample Clocks + 16 ns (1.25 GS/s)
Clock Modes	Internal, External Reference Clock
External Reference Clock	10 MHz to 1.25 GHz
External Clock Type	Single-ended, sine or square wave 0.3 V (square) or 1 V (sine) to 3.0 V peak-peak
Multi-Purpose I/O	Input: Asynchronous Digital-In Output: Marker, Synchronous Digital-Out, Asynchronous Digital-Out, Trigger Out, Status, System Clock, Digital Pulse Generator

# generatorNETBOX



### ▶ Mobile LXI/Ethernet generatorNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- DC power supply option available
- Embedded Server option available

### ▶ 19" LXI/Ethernet generatorNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections SMA
- Embedded Server option available

8 Channels	4 Channels	2 Channels
DN2.662-08 8 x 625 MS/s	DN2.662-04 4 x 625 MS/s	DN2.662-02 2 x 625 MS/s
	DN2.663-04 4 x 1.25 GS/s	DN2.663-02 2 x 1.25 GS/s


24 Channels	20 Channels	16 Channels	12 Channels	10 Channels	8 Channels	6 Channels
DN6.662-24 24 x 625 MS/s	DN6.662-20 20 x 625 MS/s	DN6.662-16 16 x 625 MS/s	DN6.662-12 12 x 625 MS/s			
			DN6.663-12 12 x 1.25 GS/s	DN6.663-10 10 x 1.25 GS/s	DN6.663-08 8 x 1.25 GS/s	DN6.663-06 6 x 1.25 GS/s

# 65xx Series – 16 Bit Arbitrary Waveform Generators up to 125 MS/s ...

- One, two, four or eight channel PCIe card versions
- Four to 48 channel LXI/Ethernet versions
- Four software-selectable analog filters per channel
- Output level up to  $\pm 3$  V into  $50 \Omega$   
( $\pm 6$  V into high-impedance)
- High-voltage version with output level up to  $\pm 6$  V  
into  $50 \Omega$  ( $\pm 12$  V into high-impedance)
- Fixed trigger to output delay
- 64 MSamples up to 512 MSamples memory per channel
- Fast FIFO streaming mode included
- Sequence Replay mode
- 20 (4 standard +16 as option) multi-purpose I/O

  
**UP TO  
8 CHANNELS  
PER CARD**

8-channel-versions and high-voltage versions occupy 2 slots width

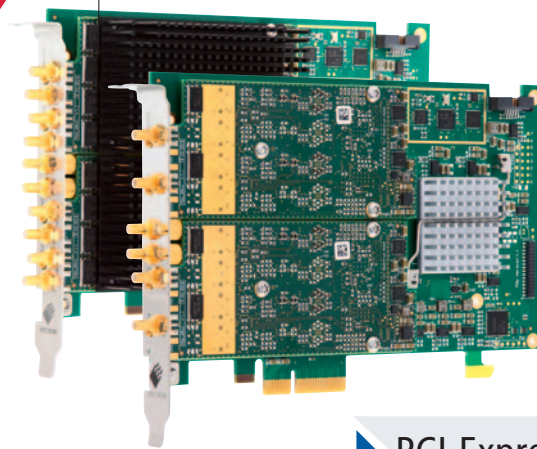

### STAR-HUB

This piggy-back module synchronizes multiple cards of the whole M2p-family (digitizers, AWGs and Digital I/O). The star-hub is available for 6 cards or 16 cards and can either be ordered as top mount (TM) version with two slots width or as Extension (EX) version with 1 slot width and 245 mm length.



### DIGITAL OPTION

This piggy-back module adds 16 additional digital lines to the 4 multi-purpose I/O lines that are already standard on the cards. It allows a single 59xx card to run as a mixed mode device with 8 analog channels and 20 synchronous digital output channels.



The module is available in two different versions, one with SMB connectors and one with an FX2 flat-ribbon connector.



### ► PCI Express AWG

- PCIe x4 Gen1 Interface
- Up to 700 MByte/s streaming rate
- Star-Hub for internal synchronization up to 16 cards
- 1/2 length (168 mm) single-slot card
- SMB and MMCX connections
- SCAPP option for CUDA-based data generation

Sampling Rate	Bandwidth	Output Level	Resolution
40 MS/s	70 MHz	$\pm 3$ V ( $\pm 6$ V)	16 Bit
40 MS/s	70 MHz	$\pm 6$ V ( $\pm 12$ V)	16 Bit
125 MS/s	70 MHz	$\pm 3$ V ( $\pm 6$ V)	16 Bit
125 MS/s	70 MHz	$\pm 6$ V ( $\pm 12$ V)	16 Bit

8 Channels	4 Channels	2 Channels	1 Channel
M2p.6533-x4 8 x 40 MS/s	M2p.6536-x4 4 x 40 MS/s	M2p.6531-x4 2 x 40 MS/s	M2p.6530-x4 1 x 40 MS/s
	M2p.6546-x4 4 x 40 MS/s	M2p.6541-x4 2 x 40 MS/s	M2p.6540-x4 1 x 40 MS/s
M2p.6568-x4 8 x 80 MS/s 4 x 125 MS/s	M2p.6566-x4 4 x 125 MS/s	M2p.6561-x4 2 x 125 MS/s	M2p.6560-x4 1 x 125 MS/s
	M2p.6576-x4 4 x 125 MS/s	M2p.6571-x4 2 x 125 MS/s	M2p.6570-x4 1 x 125 MS/s

## Technical Details

DAC Type	16 Bit, non-interpolating
Output Impedance	50 Ω
Output Level Standard	±3 V into 50 Ω (±6 V into high-impedance)
Output Level High Voltage	±6 V into 50 Ω (±12 V into high-impedance)
Marker Outputs	4 (+16 as option) free programmable 1 loop marker
SNR (800 kHz signal)	91 dB (±900 mV)
ENOB (800 kHz signal)	14.7 Bit
NSD	-142 dBm/Hz (±900 mV)
Trigger Modes	External, Software, Pulse, OR/AND, Delay, Holdoff
Replay Modes	Single-Shot, FIFO, Multiple Replay, Gated Replay, Sequence Replay Mode, Stream from CUDA-GPU (Option, PCIe only)
External Trigger	1 with programmable level ±5 V, 3 additional LVTTL
Sequence Replay Mode	Up to 4k sequence steps Up to 64k segments Up to 1M loops Loop until Trigger Data and sequence steps overload at runtime
Trigger to Output Delay	63 sample clocks + 7 ns
Clock Modes	Internal, Direct External Clock, External Reference Clock
Sampling Clocks	1 kS/s up to maximum sampling clock
External Reference Clock	128 kHz to 125 MHz
External Clock Type	Single-ended, sine or square wave with programmable level ±5 V
Multi-Purpose I/O	Input: Asynchronous Digital-In, Logic-Trigger Output: Marker, Synchronous Digital-Out, Asynchronous Digital-Out, Trigger-Out, Status, DAC Clock, Digital Pulse Generator

# generatorNETBOX



### ▶ Mobile LXI/Ethernet generatorNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections BNC
- DC power supply option available
- Embedded Server option available

### ▶ 19" LXI/Ethernet generatorNETBOX

- GBit Ethernet Interface
- Remote Control
- Up to 100 MByte/s streaming speed
- All connections BNC
- Embedded Server option available


16 Channels	8 Channels	4 Channels
DN2.653-16 16 x 40 MS/s	DN2.653-08 8 x 40 MS/s	DN2.653-04 4 x 40 MS/s
	DN2.654-08 8 x 40 MS/s	DN2.654-04 4 x 40 MS/s
DN2.656-16 16 x 80 MS/s 8 x 125 MS/s	DN2.656-08 8 x 80 MS/s 4 x 125 MS/s	DN2.656-04 4 x 125 MS/s
	DN2.657-08 8 x 125 MS/s	DN2.657-04 4 x 125 MS/s

48 Channels	40 Channels	32 Channels	24 Channels
DN6.653-48 48 x 40 MS/s	DN6.653-40 40 x 40 MS/s	DN6.653-32 32 x 40 MS/s	DN6.653-24 24 x 40 MS/s
DN6.656-48 48 x 80 MS/s 24 x 125 MS/s	DN6.656-40 40 x 80 MS/s 20 x 125 MS/s	DN6.656-32 32 x 80 MS/s 16 x 125 MS/s	DN6.656-24 24 x 80 MS/s 12 x 125 MS/s

# 96xx Series – DDS Generators with 50 tones per channel .....

- Fast 16 bit DAC with FPGA-based DDS
- DDS frequency DC to 200 MHz
- Up to 50 DDS cores on one channel
- Native DDS-commands: Frequency, Amplitude, Phase, Frequency Slope, Amplitude Slope, Wait for trigger, Digital outputs
- DDS commands can be issued with 6.4 ns spacing
- Huge on-board memory for millions DDS commands

The new DDS Instruments offer up to 50 sine wave carriers on one single output channel. This feature provides a new way for engineers and scientists to produce and independently control multi-tone sine signals. DDS, which is short for "Direct Digital Synthesis", is a powerful technique for generating high-purity signals (typically sinewaves, also called carriers or tones). The 12 new models provide fine frequency resolution and ultrafast switching between output frequencies up to 200 MHz. For applications needing more than 50 tones, the larger NETBOX units support

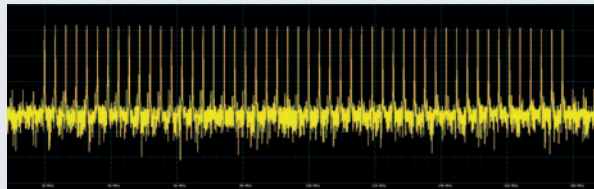

50 sine wave carriers in frequency domain

up to 6 times 50 tones, or it is possible to connect multiple cards together with the Star Hub synchronization module to create systems with up to 8 times 50 tones. The multiple sources need to be combined externally to form systems with up to 400 DDS cores.



DDS GENERATORS



### ▶ PCI Express DDS Generator

- PCIe x8 Gen2 Interface
- Star-Hub for internal synchronization up to 8 cards
- ¾ length (241 mm) single-slot card
- SMA and MMCX connections



### ▶ PXI Express DDS Generator

- PCIe x4 Gen2 Interface
- 3U double-width card
- PXIe reference clock supported
- PXIe trigger bus and star-trigger supported
- SMA and MMCX connections

Sampling Rate	Bandwidth	Output Level	Resolution
625 MS/s	200 MHz	±2.5 V	16 Bit

4 Channels	2 Channels	1 Channel
M4i.9622-x8 4 x 625 MS/s	M4i.9621-x8 2 x 625 MS/s	M4i.9620-x8 1 x 625 MS/s

4 Channels	2 Channels
M4x.9622-x4 4 x 625 MS/s	M4x.9621-x4 2 x 625 MS/s

## Technical Details

DAC Type	16 Bit, non-interpolating	
Output Impedance	50 Ω	
Output Level in 50 Ω	±2.5 V	
Marker Outputs	3 free programmable	
SNR (10 MHz signal)	72.4 dB (625 MS/s, ±1 V)	
ENOB (10 MHz signal)	11.7 dB (625 MS/s, ±1 V)	
NSD	-149 dBm/Hz (625 MS/s, ±1 V)	
Trigger Modes	External, Software, Window, Re-Arm, Delay, OR/AND	
DDS commands	individual for each core	Set Frequency, Set Amplitude, Set Phase, Frequency Slope, Amplitude Slope
DDS commands	for all cores	Reset, Execute Now, Execute at Trigger/Timer
DDS time resolution	625 MS/s (1.6 ns)	
DDS timer resolution	software programmable	83.2 ns up to 27.48 s with a resolution of 6.4 ns
DDS command buffer	single mode	4k commands
	DMA mode	512M commands in on-board RAM. More commands can reside in DMA buffer in PC-RAM
Min user software to analog output latency	single mode	10 us
	DMA mode	20 us
Max continuous DDS command rate	single mode	400 kHz
	DMA mode	10 MHz
External Trigger	2 Inputs, programmable level ±10 V	
Trigger to Output Delay	238.5 Sample Clocks + 16 ns (625 MS/s)	
	476.5 Sample Clocks + 16 ns (1.25 GS/s)	
Clock Modes	Internal, External Reference Clock	
External Clock Type	Single-ended, sine or square wave 0.3 V (square) or 1 V (sine) to 3.0 V peak-peak	
Multi-Purpose I/O	Marker, Synchronous Digital-Out, Asynchronous Digital-Out, Trigger Out, Status, System Clock, Digital Pulse Generator Option	

# generatorNETBOX



### Mobile LXI/Ethernet DDS Generator

- GBit Ethernet Interface
- Remote Control
- All connections SMA
- DC power supply option available
- Embedded Server option available

8 Channels	4 Channels	2 Channels
DN2.962-08	DN2.962-04	DN2.962-02
8 x 625 MS/s	4 x 625 MS/s	2 x 625 MS/s

### 19" LXI/Ethernet DDS Generator

- GBit Ethernet Interface
- Remote Control
- All connections SMA
- Embedded Server option available

24 Channels	20 Channels	16 Channels	12 Channels
DN6.962-24	DN6.962-20	DN6.962-16	DN6.962-12
24 x 625 MS/s	20 x 625 MS/s	16 x 625 MS/s	12 x 625 MS/s

# Digitizer and AWG in one box.....

# hybridNETBOX

hybridNETBOX – a multi-channel digitizer and AWG in one portable box! This single LXI/Ethernet instrument simultaneously generates, acquires and analyzes electronic signals in manual, automated or remotely controlled applications.

- Digitizer and AWG in one Instrument
- For: Stimulus-Response, Record/Replay, ATE, MIMO, etc.

## ► hybridNETBOX up to 125 MS/s

- 2+2, 4+4 or 8+8 channels with 40 MS/s or 125 MS/s
- 512 MSamples of memory for both the AWG and Digitizer
- AWG: output up to  $\pm 12$  V into high impedance
- AWG: fixed trigger to output delay
- Digitizer: single-ended or differential inputs
- Digitizer: 6 input ranges:  $\pm 200$  mV up to  $\pm 10$  V
- Up to 8 multi-purpose digital I/O lines



DIGITIZER / AWG



Model with 8+8 channels (DN2.80x-08)



Model with 4+4 channels (DN2.81x-04)



Model with 2+2 channels (DN2.81x-02)

### Versions

Digitizer Speed	Digitizer Bandwidth	Digitizer Resolution	AWG Speed	AWG Output Level	2+2 Channels	4+4 Channels	8+8 Channels
40 MS/s	20 MHz	16 Bit	40 MS/s	$\pm 6$ V ( $\pm 12$ V)	DN2.813-02	DN2.813-04	DN2.803-08
40 MS/s	20 MHz	16 Bit	40 MS/s	$\pm 3$ V ( $\pm 6$ V)			
125 MS/s	60 MHz	16 Bit	125 MS/s	$\pm 6$ V ( $\pm 12$ V)	DN2.816-02	DN2.816-04	DN2.806-08
125 MS/s	60 MHz	16 Bit	125 MS/s	$\pm 3$ V ( $\pm 6$ V)			

## ► hybridNETBOX up to 500 MS/s

- 2+2 or 4+4 channels with 180 MS/s to 500 MS/s
- 2 GSamples of memory for both the AWG and Digitizer
- AWG: 625 MS/s (4 channels) or 1.25 GS/s (2 channels)
- AWG: up to  $\pm 3$  V into 50 ohms
- Digitizer: 6 input ranges:  $\pm 200$  mV up to  $\pm 10$  V
- Digitizer: Block Average and Block Statistics option
- 6 multi-purpose digital I/O lines



Model with 4+4 channels (DN2.82x-04)



Model with 2+2 channels (DN2.82x-02)

### Versions

Digitizer Speed	Digitizer Bandwidth	Digitizer Resolution	AWG Speed	AWG Output Level	2+2 Channels	4+4 Channels
180 MS/s	125 MHz	16 Bit	1.25 GS/s	$\pm 2.5$ V ( $\pm 5$ V)	DN2.827-02	
180 MS/s	125 MHz	16 Bit	625 MS/s	$\pm 3$ V ( $\pm 6$ V)		DN2.827-04
250 MS/s	125 MHz	16 Bit	1.25 GS/s	$\pm 2.5$ V ( $\pm 5$ V)	DN2.822-02	
250 MS/s	125 MHz	16 Bit	625 MS/s	$\pm 3$ V ( $\pm 6$ V)		DN2.822-04
400 MS/s	250 MHz	14 Bit	1.25 GS/s	$\pm 2.5$ V ( $\pm 5$ V)	DN2.828-02	
400 MS/s	250 MHz	14 Bit	625 MS/s	$\pm 3$ V ( $\pm 6$ V)		DN2.828-04
500 MS/s	250 MHz	14 Bit	1.25 GS/s	$\pm 2.5$ V ( $\pm 5$ V)	DN2.825-02	
500 MS/s	250 MHz	14 Bit	625 MS/s	$\pm 3$ V ( $\pm 6$ V)		DN2.825-04

Dual-Use listed products that require a license to export outside of Europe/US/Canada

# Digital Data Acquisition

Digital data acquisition cards are focused on digital signals. Input signals have two logic levels called low state (0) and high state (1). The electrical representation of these logical levels depends on the logic family and the supported I/O standard.

Digital Data Acquisition or Logic Analyzers acquire digital data signals by sampling it with either an internal sampling clock or an external state clock. The acquired data is stored to the on-board memory or continuously transferred to host PC using the streaming (FIFO) mode. The acquisition can be triggered by external trigger signal or by complex pattern trigger just as known from logic analyzers.

## Features and Operating Modes

Digital Data Acquisition Cards may incorporate multiple operating modes which determine how the data is acquired and stored to memory. Furthermore the cards can interact with external clock and trigger signals to organize the data acquisition.



The FIFO mode is designed for continuous data transfer between the data acquisition card and the PC memory or hard disk. It uses the complete on-board memory as a real FIFO buffer, making the transfer extremely reliable. Data is transferred over the bus by the driver without the need for the user to make any special setup. All Spectrum products are designed to reach maximum continuous transfer speed which can reach up to 3.4 GByte/s on a PCIe x8 Gen2 interface.



Multiple recording allows the acquisition of several trigger events without restarting the hardware. The on-board memory is split into segments and for each trigger event one segment is recorded. The segment size and the pre- and posttrigger settings can be freely defined. The powerful combination of a small re-arming time and FIFO mode makes it easy to adapt to nearly every measurement task.



Acquisitions can be triggered by either dedicated trigger signals that have separate inputs or a by a programmable pattern trigger. Furthermore a combination of both is usable with a conjunction of OR or AND.



A sampling clock can be fed in from an external source. For synchronous sampling this source can be used as reference clock for the internal sampling clock. Furthermore this source can also be treated as a state clock with a programmable clock delay and direct sampling on the clock edge (SDR and DDR) – independent of any frequency changes or even clock gaps.



With Gated Sampling the acquisition is controlled by an external gate signal. Data is only acquired if the gate signal has reached a programmed level. Before and after each gate a programmable number of samples will be acquired in addition.

Gated Sampling can be combined with timestamps for time-correct positioning of the gate segments and to determine the length of each acquired gate segment.



The Timestamp mode writes the time positions of the trigger events into an extra memory. The Timestamps are relative to the start of recording, to a defined zero time or externally synchronized to the seconds signal from a radio clock or a GPS receiver. With this mode acquisitions of systems in different locations may be set in a precise time relation.

The Timestamp memory is designed as a FIFO buffer allowing the readout of Timestamps also in FIFO mode.

# 77xx Series – 32 Channel Digital Waveform Acquisition

- Up to 720 MBit/s sampling rate in timing analysis mode
- Up to 700 MBit/s DDR sampling rate in state clock mode
- State clock with gaps allowed
- Programmable clock delay
- Differential interface version (for LVDS, (LV)PECL, (N)ECL and other differential signals)
- Single-ended interface version for logic levels 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, 5.0 V
- 4 GByte on-board memory (1 GBit per channel)

## Technical Details

Available Inputs	Data D0 to D31, Trigger (TrigIn), Strobe, Clock (ClkIn), X0, X1
Differential Interface	LVDS, LVPECL, PECL, (N)ECL, universal differential inputs
Single-Ended Interface	Compatible to 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, 5.0 V (LV)TTL and (LV)CMOS logic levels
Input Coupling	DC
Input Type	High-speed comparator with 25 mV hysteresis (Differential Input) High-speed comparator with programmable threshold (Single-Ended Input)
Input Termination	125 $\Omega$ differential termination (Differential Input) 75 $\Omega$ / 4.7 k $\Omega$ separately programmable (Single-Ended Input)
Open Inputs	fail save -> defined and fixed input level with open inputs, no external termination necessary
Trigger Modes	External, Software, Pattern Trigger
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Gated Sampling
Trigger Delay	programmable up to 8 GSamples
Re-Arming Time	40 samples
Clock Modes	Internal, External Reference Clock, State Clock
Clock Setup Granularity	1 Hz
External Reference Clock	10 MHz to 1 GHz
State Clock	SDR with programmable clock edge, DDR, gaps allowed
Multi-Purpose I/O	Input: Asynchronous Digital-In, Timestamp Reference Clock Output: Asynchronous Digital-Out, Trigger Out, Status, PLL Reference Clock



**M4i**  
series

### PCI Express

- PCIe x8 Gen2 Interface
- Up to 3.4 GByte/s streaming rate
- Star-Hub for internal synchronization up to 8 cards
- ¾ length (241 mm) single-slot card
- 2 VHDCI Connectors

Sampling Rate	State Clock	Channels
125 MBit/s	125 MBit/s	32
250 MBit/s	250 MBit/s	32
720 MBit/s	700 MBit/s	32

Single-Ended	Differential
M4i.7710-x8 32 x 125 MS/s	
M4i.7720-x8 32 x 250 MS/s	M4i.7725-x8 32 x 250 MS/s
M4i.7730-x8 32 x 720 MS/s	M4i.7735-x8 32 x 720 MS/s

# 75xx Series – versatile fast Digital I/O card

- 32 digital I/O channels
- 1 kS/s up to 125 MS/s sampling speed
- PCI Express x4 interface with 700 MB/s FIFO speed
- 1 GByte of on-board memory
- Synchronization of up to 16 cards per system
- Mixed Mode systems with Digitizer and AWG
- Features: Single-Shot, Streaming, Multiple Recording/Replay, Gated Sampling/Replay, Sequence Mode, Timestamps

### STAR-HUB


This piggy-back module synchronizes multiple cards of the whole M2p-family (digitizers, AWGs and Digital I/O). The star-hub is available for 6 cards or 16 cards and can either be ordered as top mount (TM) version with two slots width or as Extension (EX) version with 1 slot width and 245 mm length.



## Technical Details

Direction	All channels input or all channels output (no mixed direction)
Available Inputs	Data D0 to D31, Trigger (TrigIn), Clock (ClkIn), X0, X1, X2, X3
Interface (Digital Input)	Compatible to 3.3 V and 5.0 V (LV)TTL
Input Coupling	DC
Input Termination	110 Ω /50 k Ω    15 pF
Interface (Digital Output)	3.3 V LVTTTL
Output Impedance	7 Ω
Trigger Modes	External, Software
Acquisition Modes	Single-Shot, FIFO, Multiple Recording, Gated Sampling
Generation Modes	Single-Shot, Single Restart, Repeated, FIFO, Multiple Replay, Gated Replay, Sequence Mode
Trigger Delay	programmable up to 4 GSamples
Trigger Hold-Off	programmable up to 4 GSamples
Re-Arming Time	40 samples
Clock Modes	Internal, Direct External Clock (State Clock), External Reference Clock
Clock Setup Granularity	1 Hz
External Reference Clock	128 kHz to 125 MHz
Multi-Purpose I/O	Input: Asynchronous Digital-In, Timestamp Reference Clock, Logic Trigger Output: Asynchronous Digital-Out, Trigger Out, Status

DIGITAL IN / OUT

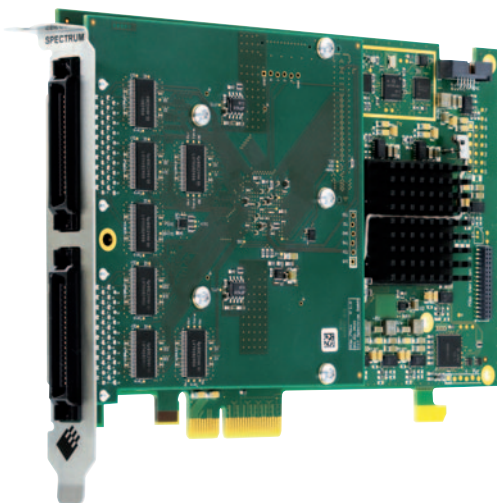

**M2p**  
series



### ▶ PCI Express Digital I/O

- PCIe x4 Gen1 Interface
- More than 700 MByte/s streaming rate
- Star-Hub for internal synchronization up to 16 cards
- ½ length (168 mm) single-slot card
- SCAPP option for CUDA-based calculations

Sampling Rate	Channels	Card
125 MBit/s	32	M2p.7515-x4

# Examples for Systems with STAR-HUB synchronization

16 digitizer cards M2p.5968-x4 in one PC will form a system with 128 fully synchronized acquisition channels and 80 MS/s speed.

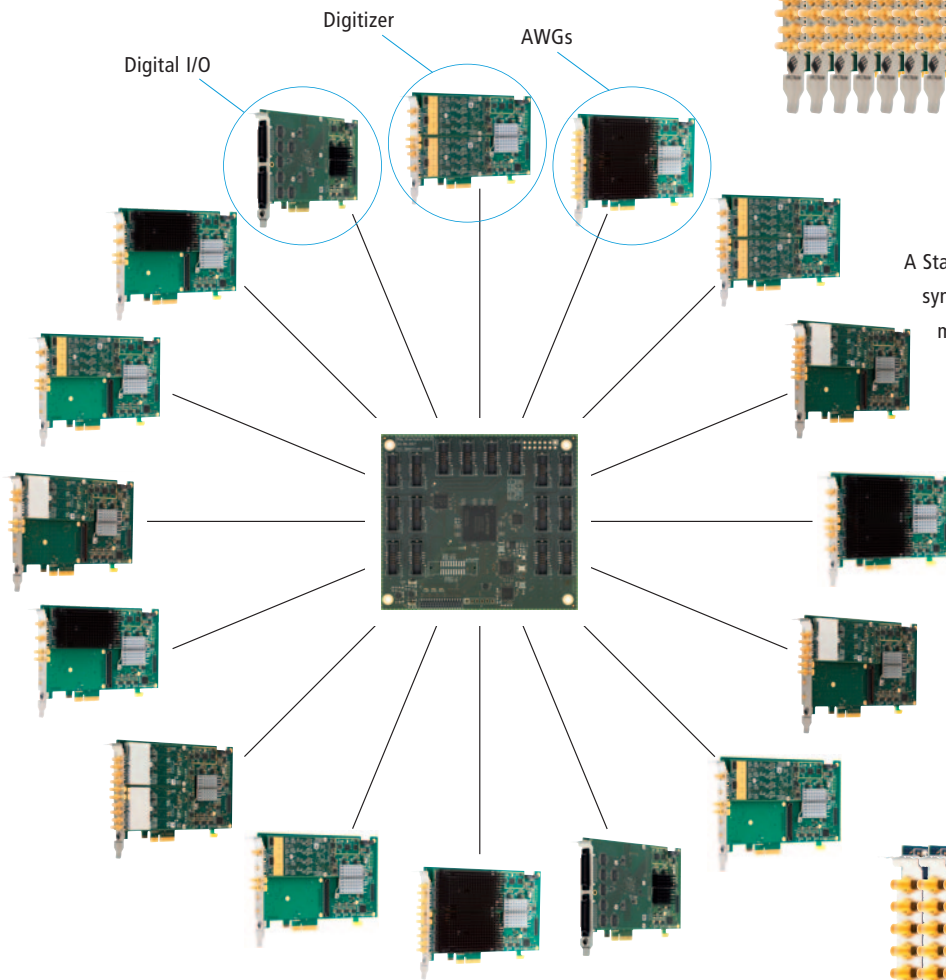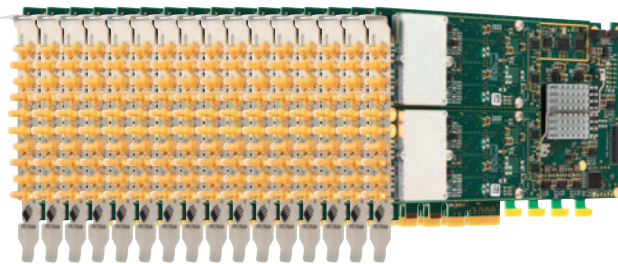


A Star-Hub of the M2p-series can fully synchronize up to 16 cards. To build customized multi-channel test systems, every user can choose from 24 different digitizers, 14 different AWGs and one Digital I/O card and freely combine them.

A Star-Hub of the M4i-series can fully synchronize up to 8 cards. There are 17 digitizers or 5 AWGs or 5 Digital Acquisition cards to choose from. The example shows 8 cards of the model M4i.6622-x8 for synchronous signal generation on 32 channels with 625 MS/s.




Every card is connected to the Star-Hub module with a small cable of the same length. In this way, the clock skew between the cards is kept under 130 pico-seconds!

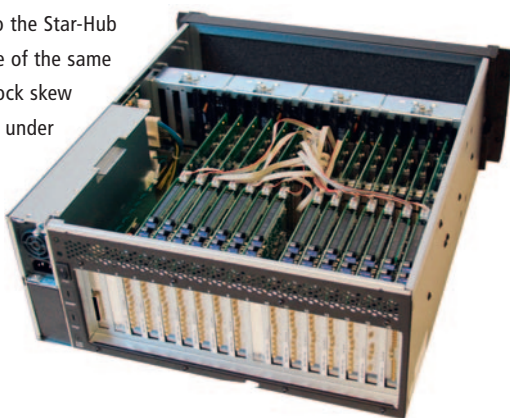

A PC with 8x M2p.5968-x4 (64 digitizer channels in total) and 1x M2p.6561-x4 (2 AWG channels, third card from the bottom). The Star-Hub is mounted as extension on one of the digitizer cards (see middle of the photo) with 9 small sync-cables in use.



For Stimulus-Response-Systems and Closed-Loop-Applications, one AWG and one digitizer can be synchronized in a portable housing.

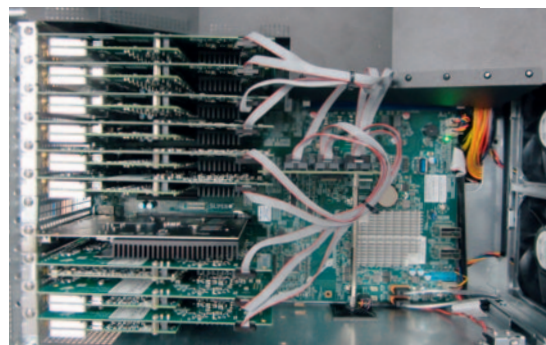


# Turn-Key High-Performance Streaming Systems

Sold in the European Union only, white paper for self-setup available

- Continuous (seamless) data recording
- Guaranteed streaming speed up to 3 GByte/s
- Complete turn-key PC solution
- Data storage options from 1 to 96 Terabyte
- Single-Shot and Multiple (segmented) acquisition modes
- Sampling rates up to 10 GS/s (segmented) and 6.4 GS/s (single-shot)
- Configurations with 1 to 128 channels in one chassis
- Configurations up to 256 channels with docking station
- SBench 6 software for easy control, display and analysis
- Factory integrated and performance tested

Streaming to disk up to 3 GByte/s

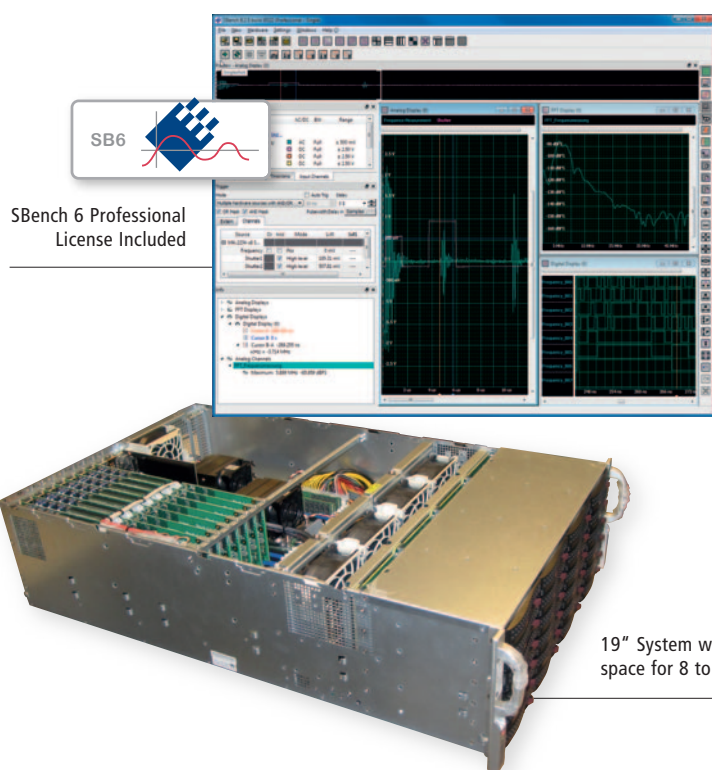

Combining a number of Spectrum M2p or M4i PCIe digitizers with a Tera-Store Data Streaming solution allows the capture and storage of long complex signals for extended periods of time. With systems offering from 1 to 96 TB of storage and streaming rates up to 3 GB/s signals can be digitized and stored seamlessly for hours on end.

At the heart of the system is a carefully selected base PC system. As a choice a Supermicro 4U/Tower with 8 drive bays and 6 free PCIe slots for Spectrum cards or a Supermicro 19" system with 24 drive bays and 8 to 10 free PCIe slots for Spectrum cards are available. The PCs are powered with Xeon Quad Core CPUs and are equipped with a separate 256 GB SSD for the system installation, low-noise power supplies and sufficient memory. The plug-in cards have additional mechanical fixtures to avoid any vibration problems.

For large multi-digitizer systems Spectrum also provides the Star-Hub, a unique clock and trigger distribution system, which allows all the installed digitizer cards of one family to be clocked synchronously and to share a common trigger. The Star-Hub is already included in the base system. Storage systems are available offering a range of streaming rates, from 500 MB/s up to 3 GB/s, and storage capacities from 1 TB to 96 TB. The options consist of a high performance RAID controller and a number of solid-state or hard-disk drives (SSD/HDD) configured to support the required transfer rates and storage times. Spectrum integrates the complete system, providing factory configuration and performance testing. This includes the PC setup, software and hardware installation and digitizer calibration. Hardware and software are both optimized and tested to guarantee the specified streaming rates.

# Multi-Card PC Systems and Docking Stations

Sold in the European Union only

All Spectrum cards can be operated in standard off-the-shelf PC systems. Using world-wide standards like PCI Express or PXI Express and latest operating system drivers ensures compatibility and offers an extremely wide choice of PC components to be used with the Spectrum products.


Standard PC technology offers a maximum of 7 slots where 4 to 6 of them are available to Spectrum cards. Looking at power consumption and heat dissipation of the high-performance instruments a good cooling concept and sufficient power supply is mandatory.

To help customers building high performance card-based systems Spectrum is also offering full running and installed systems. For up Configurations with 1 to 128 channels in one chassis to 8 cards the streaming base system shown on page 32 can be used. For more cards per system or for expansion systems there are plenty of solutions that have been individually built based on standard components:



External 3 slot PCIe docking station. Small expansion box for a standard PC (PCI Express) or a Laptop (Thunderbolt)

19" 5U system with 18 slot backplane and 16 PCIe slots available for Spectrum cards. Allows to run up to 256 channels in a single chassis.

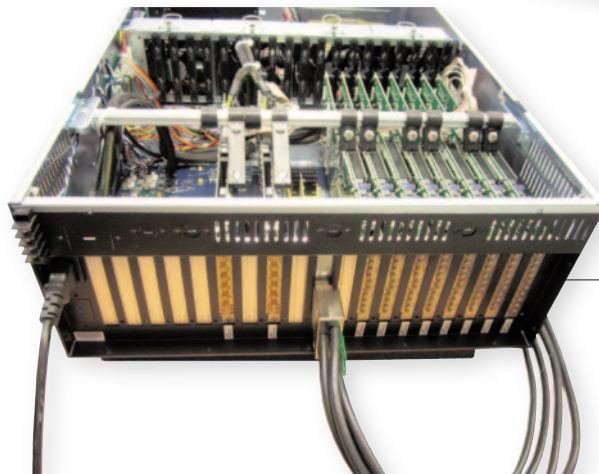

External 16 slot PCIe docking station. Expansion box for a standard PC bringing 16 PCIe slots into any host system.

## Accessories



### Adapter Cables

Matching the variety of different signal and auxiliary connections, Spectrum is offering a complete range of adapter cables using proven industrial shielded connections. Supported connections are SMA, BNC, SMB and MMCX, all in male and female style.

For high-speed digitizers with signal frequencies way above 100 MHz, special low loss adapter cables are available.




### External Amplifiers


Independent external pre-amplifiers allow to acquire extremely small signals down into the low  $\mu V$  range with a reasonable quality. The external amplifiers are optimized for low noise inputs. The amplifiers of the SPA series are available with different bandwidth and input impedance options. No programming is needed to operate these amplifiers.

# Software

The connecting link between the user and the hardware is always the software. The wide range of software products supported by Spectrum allows the user to select the software that they want:

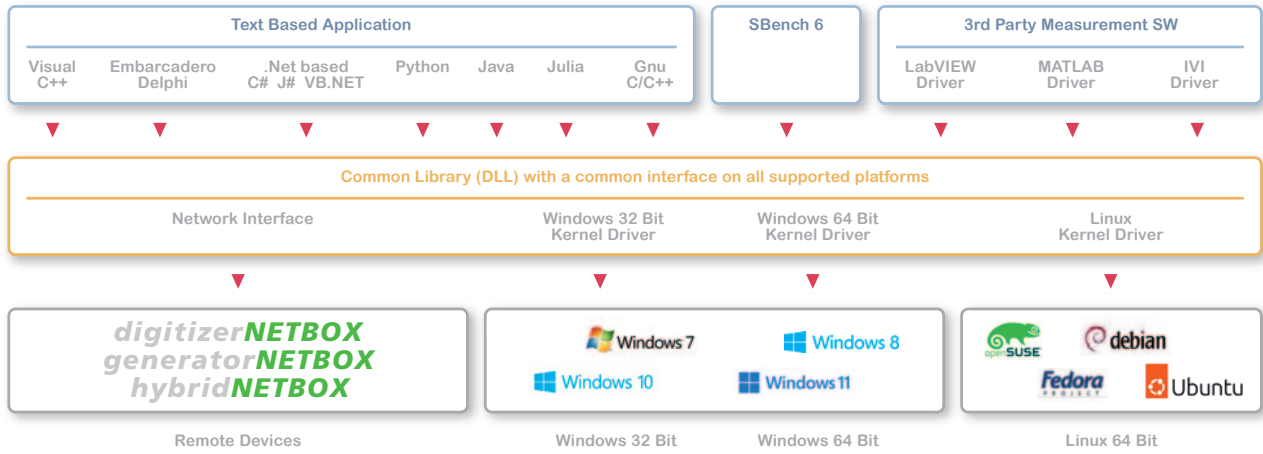

## ▶ Operating System Drivers

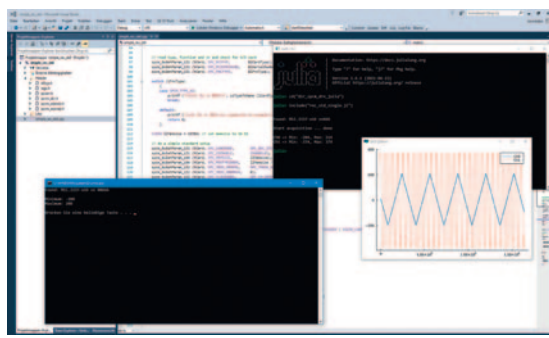

The standard driver is available for different operating systems and is programmed everywhere in the same way. This allows an easy change from one operating system to another without major changes in the source code.


The complete SDK including all drivers and examples is delivered with the hardware and updates are available from the Spectrum homepage at any time. There are **no additional SDK fees!**

The driver has a common interface for all products allowing an easy switch from one card type to another without big changes in the software. The different functionality of the products is realized with the help of board specific software registers. Programming examples are available for different languages as seen in the above overview picture. Due to the simple yet powerful interface of the driver, the integration in other programming languages or special measurement software is an easy task.

The number of examples is continuously increasing giving more detailed programming examples that allow an easy start with the Spectrum products.

## ▶ Linux Support

In many areas Linux has proven itself as a high-quality alternative to Windows. Also the instrumentation market uses more and more Linux-based systems. For many years Spectrum has provided loadable Linux kernel modules for all its products for the most common Linux distributions. We also support less common Linux versions. To make this possible the source code of the driver module and the required makefiles are available from Spectrum. The user can then compile a perfectly matching version for his Linux installation.

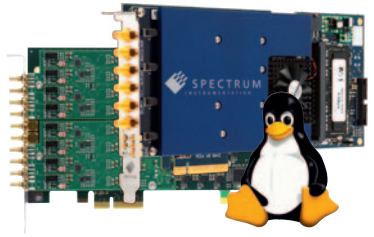

Linux driver delivery contains driver modules for many different Linux distribution versions, including the latest version of openSUSE, Fedora, Ubuntu and Debian.


Besides the Linux drivers, Spectrum is giving full Linux support for all current software products. The Linux version of the Spectrum Control Center allows all card maintenance including firmware updates, calibration and test programs. Using the Linux versions of SBench 6 provides a fully functional data acquisition and streaming application under Linux. Both programs are made from the same source code as the Windows version giving Linux users full features and functions on the same level as Windows users. There's no development or porting delay between versions.

## ▶ Spectrum Remote Server

Using the Spectrum Remote Server it is possible to access the M2p/M2i/M3i/M4i/M4x/M5i card(s) installed in one PC (server) from another PC (client) via local area network (LAN), similar to using a digitizerNETBOX. The remote server option has to be activated by software license in any of the Spectrum cards in the remote system to operate it.

It is possible to use different operating systems on both server and client. For example the Remote Server is running on a Linux system and the client is accessing them from a Windows system.


Access to the remote cards is done through a transparent internal link of the Spectrum driver. There is no difference in accessing remote cards from accessing local cards.

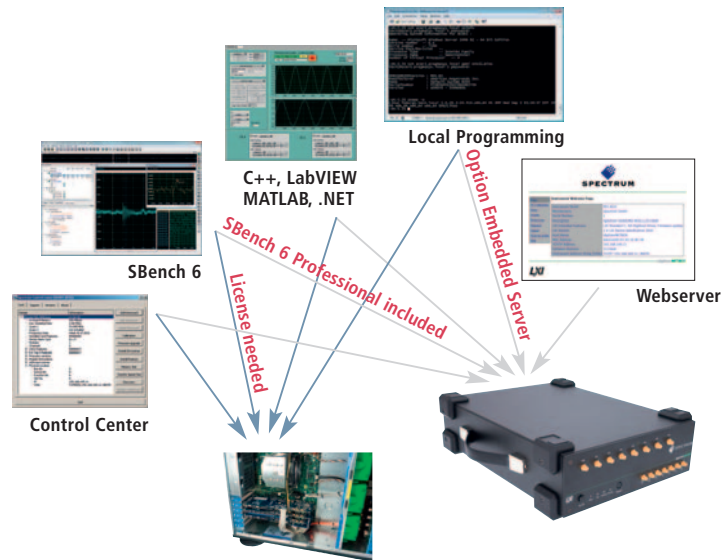

## ▶ LabVIEW

LabVIEW – the most common graphical programming language for measurement applications – is very well supported by the Spectrum digitizer hardware with the use of dedicated LabVIEW drivers. They combine different functions into functional blocks and make them available within LabVIEW. The LabVIEW driver package consists of several different dynamic libraries (LLBs) and some open example VIs showing the use of the driver. Besides these libraries all driver functions can also be directly called.


The LabVIEW driver supports all LabVIEW for Windows versions starting with LabVIEW 2015 up to the current version. All new product releases are installed on our test systems and all examples are immediately checked against the latest version.

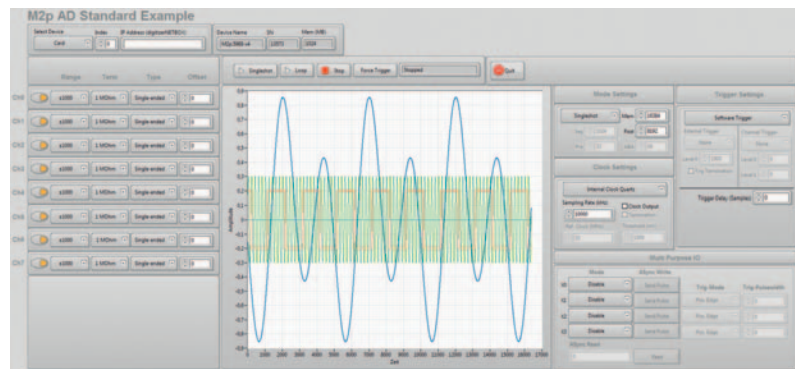

## ▶ MATLAB

The math software packet MATLAB from The Mathworks Inc. is supported starting from version 7.7 (R2008b). Both Windows and Linux versions are supported. The MATLAB driver consists of a set of Mex-files to access the Spectrum library and a bunch of examples in m-language. All features of the hardware can be accessed. The interface also offers an easy way to use the Spectrum cards with Simulink.

For control of the Spectrum products under MATLAB only the base version of the software package is necessary, no additional software options and toolboxes are required.

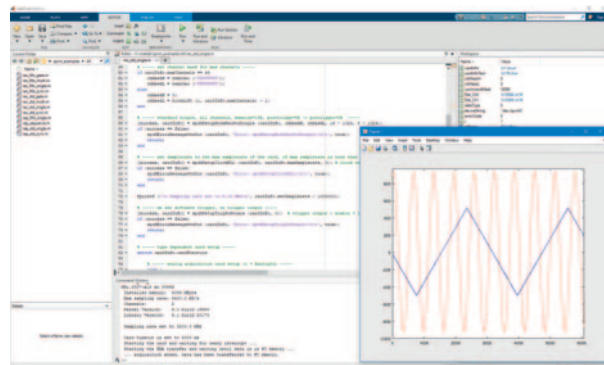

## ▶ IVI Drivers

All digitizer and AWG products from Spectrum for PCI Express, PXI Express and LXI bus also support the IVI class drivers IVI Digitizer, IVI Scope and IVI FGen. The IVI drivers allow users to access instruments of one function class with a common software interface independent of the manufacturer of the hardware. This makes it possible to use software, based on an IVI instrument driver, with many of the different digitizers or scopes available on the market.

## ▶ SDKs for text-based programming languages

The Spectrum standard API allows the access from various programming languages. The complete API is simple to use yet powerful in functionality. All programming is done using software registers and therefore only a handful of functions is needed. Including the API into a programming environment is a simple task.


### Available Examples

Included in the delivery are examples for different measurement tasks for different programming environments. A huge number of setups is supported as a standard. This gives an easy and fast start with the programming:

- Visual Studio C/C++, Gnu C++
- VB.NET, C#, J#
- Delphi
- Python
- Java
- Julia
- MATLAB (m-language)
- CUDA/SCAPP (optional)

## ▶ Control Center and Demo Mode

A special Control Center is available for the Spectrum M2i / M3i / M4i / M4x / M2p / M5i / digitizerNETBOX / generatorNETBOX / hybridNETBOX products as a stand-alone application and add-on for the drivers. This powerful tool is delivered with the cards and available under Windows and Linux and groups together all hardware maintenance functions:

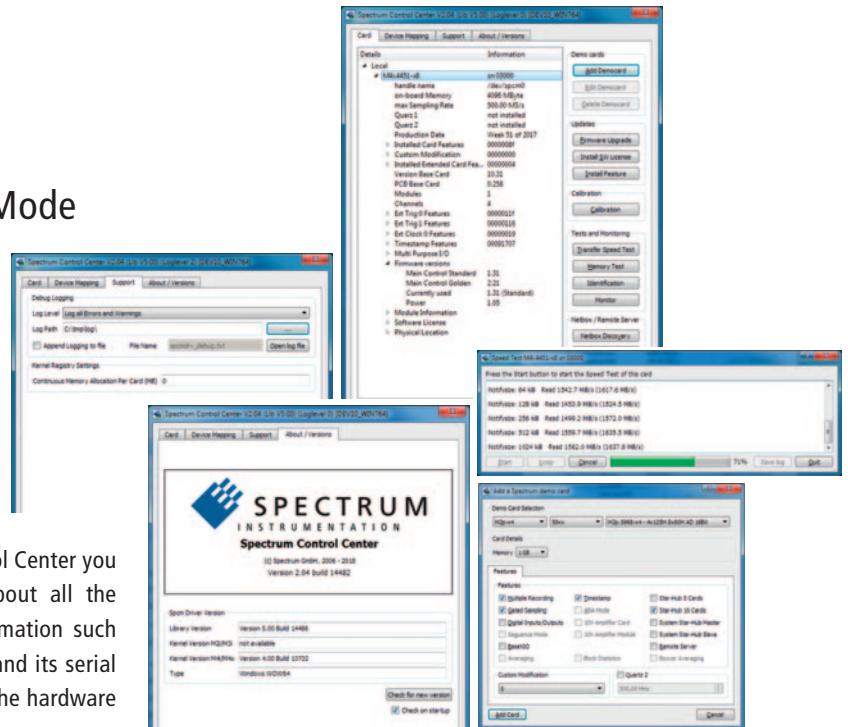

- Hardware information:** Using the Control Center you can easily get the main information about all the installed Spectrum hardware: Basic information such as the type of card, the production date and its serial number as well as the installed memory, the hardware revisions or the installed firmware.
- Installation of demo cards:** With the help of the Control Center one can install demo cards in the system. A demo card is simulated by the Spectrum driver including data generation for acquisition cards. As the demo card is simulated on the lowest driver level all software can be tested including SBench 6, own applications and drivers for third-party products like LabVIEW.
- Debug logging:** The setup of the card, driver and firmware version, all command sequences and other information can be logged to an ASCII file and can then be used for support cases.
- Features and Software license:** SBench 6 software licenses as well as all optional features of the products, that do not require any hardware modifications, can be installed on fielded cards. The customer will get a personalized upgrade code for installation.
- Firmware upgrade:** All supported products can have a later firmware upgrade to install new functions and to fix bugs. Firmware upgrade runs under Windows and Linux.
- Calibration:** The Control Center also provides an easy way to access the automatic card calibration routines of the Spectrum A/D converter cards. Depending on the used card family this can affect offset calibration only or also might include gain calibration.
- Memory test:** The complete on-board memory of the Spectrum products is tested with randomized data for proper functionality. Any read or write errors are documented.
- Transfer speed test:** Measures the bus transfer speed of an installed Spectrum card in the specific system. This gives you a performance index of the system and shows which sustained data rates can be reached.
- Netbox Discovery:** Find all digitizerNETBOX and generatorNETBOX products as well as installed Spectrum Remote Servers connected via LAN to this system. The Spectrum LXI products can be directly accessed, the integrated webserver can be called or a special monitor can be started.


For applications requiring high performance signal and data processing Spectrum offers SCAPP (Spectrum CUDA Access for Parallel Processing). The SCAPP SDK allows a direct link between Spectrum digitizers and CUDA based GPU cards. Once in the GPU users can harness the processing power of the GPU's multiple (up to 5000) processing cores and large (up to 24 GB) memory. SCAPP uses an RDMA process to send data at the digitizer's full PCIe transfer speed to the GPU card. Vice versa, the GPU can also transfer data to an AWG card.

### Spectrum's SCAPP

The Spectrum approach uses a standard off-the-shelf GPU, based on Nvidia's CUDA Standard. The GPU connects directly with the Spectrum digitizer card, with no more CPU interaction, opening the huge parallel core architecture of the CUDA card for signal processing. The structure of a CUDA graphics card fits very well as it is designed for parallel data processing, which is exactly the same as most signal processing jobs. For example, the processing tasks of data conversion, filtering, averaging, baseline suppression, FFT window functions or even FFTs themselves can all be easily parallelized.

### Details

The SCAPP driver package consists of the driver extension for Remote Direct Memory Access (RDMA) that allows the direct data transfer from Digitizer to GPU. It includes a set of examples for interaction with the digitizer and the CUDA-card and another set of CUDA parallel processing examples with easy building blocks for basic functions like filtering, averaging, data de-multiplexing, data conversion or FFT. All the software is based on C/C++ and can easily be implemented and improved with normal programming skills. Starting with tested and optimized parallel processing examples gives first results within minutes.

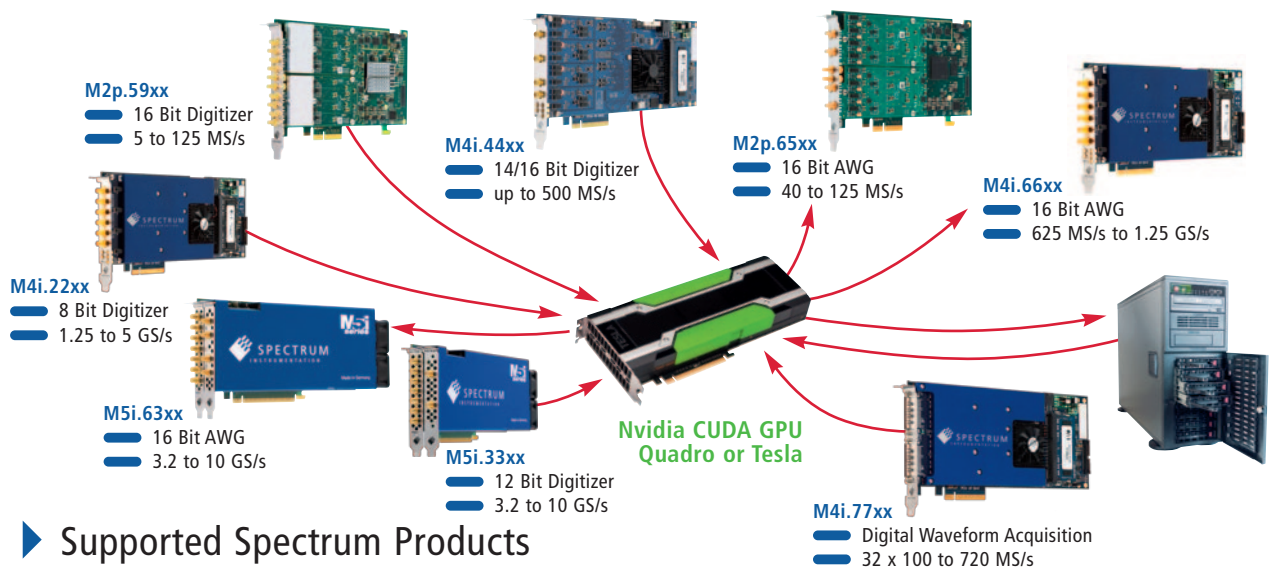

### Supported Spectrum Products

- M5i.33xx-x16: 12 Bit Digitizer up to 10 GS/s and up to 2 channels
- M5i.63xx-x16: 16 Bit AWG up to 10 GS/s and up to 2 channels
- M4i.44xx-x8: 14/16 Bit digitizer up to 500 MS/s and up to 4 channels
- M4i.22xx-x8: 8 Bit digitizer up to 5 GS/s and up to 4 channels
- M4i.66xx-x8: 16 Bit AWG up to 1.25 GS/s and up to 4 channels
- M4i.77xx-x8: 32 channel digital data acquisition up to 720 MS/s
- M2p.59xx-x4: 16 Bit digitizer up to 125 MS/s and up to 8 channels
- M2p.65xx-x4: 16 Bit AWG up to 125 MS/s and up to 8 channels
- M2p.75xx-x4: 32 channel Digital I/O up to 125 MS/s

The FFT example reaches continuous, gap-free FFT on a M4i.4451-x8 with a 1 MPoint block size on 4 channels with a sampling speed of 430 MS/s.

### What is needed?

- Motherboard with two free PCIe slots: one for the CUDA graphics card and one for the Spectrum card.
- Spectrum card with enabled SCAPP option
- NVIDIA CUDA 5.0 or above graphics card of Quadro or Tesla series
- NVIDIA Nsight SDK for CUDA programming
- NVIDIA CUDA toolkit
- Linux operating system for direct data transfer with RDMA
- Windows operation system with double DMA and data copy




### Potential Calculation Functions for SCAPP

- Digital filtering
- Baseline suppression
- FFT
- Block average
- Boxcar average
- Digital pulse processing
- Image calculation
- Digital down conversion
- Combination of above

And many more ...


# SBench 6

SB6



This easy-to-use software provides convenient and fast data acquisition and analysis of GBytes of analog and digital data together with powerful export functions.

SBench 6 is powerful and intuitive interactive measurement software. SBench 6 allows you to commence making measurements immediately, without programming, and enables hardware setup, data display, oscilloscope, transient recorder, analysis and export functions all under one easy-to-use interface.

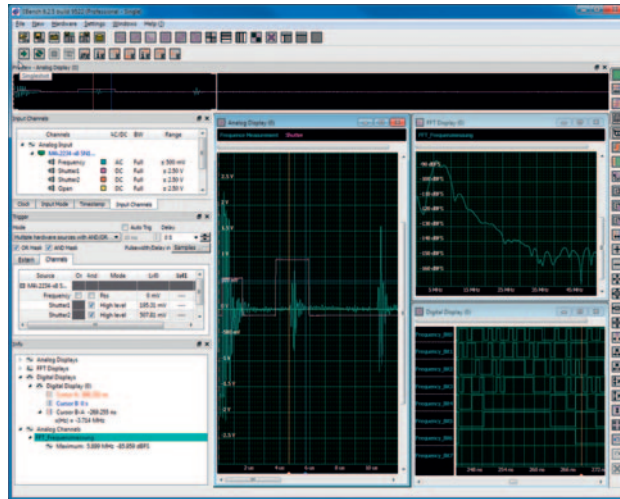

- Available for Windows 7 / Windows 8 / Windows 10 (32 / 64 bit) / Windows 11
- Available for Linux 64 bit
- Fast data acquisition supporting RAID disk arrays
- Designed to acquire and handle GBytes of data
- Display of analog data (scope), X-Y data, chart recorder and frequency spectrum
- Integrated analysis functions
- Import and export filter
- Enhanced cursor functions
- Fast data preview function
- State-of-the-art drag-and-drop technology
- Thread based program structure, optimized to run with today's multi-processor technology
- Easy usage with docking windows and context menus

## Setup Windows

All the hardware settings of the Spectrum instrument can be accessed using sophisticated tabbed setup windows. All setup windows can be docked whenever it is required to have a full overview of the configuration. Input signals can be scaled and given an individual unit to show real world measured values, compensating for sensor characteristics. The scaling and units are then used throughout the complete SBench software, be it in the display screen or in the calculation results. The look and feel of SBench 6 can be customized by locating setup widgets wherever necessary and by the individual configuration of toolbars and shortcuts. Each layout can be stored separately in a user file that can be used for future sessions of SBench 6.



## Acquisition and Replay

SBench 6 is able to act as a recorder as well as a generator front-end. The software is able to replay GBytes of either analog or digital data from various sources. Data can be imported from different file formats as well as using previously acquired data. SBench 6 automatically re-scales and converts data to allow the use of acquisition and replay cards of different resolutions and channel count.


## Data Storage

The SBench 6 engine controls the complete data transfer whether into the PC RAM or onto hard disk. The streaming engine supports different binary formats that may be used for data storage. This eliminates all time-consuming conversion jobs after the end of the acquisition. Data files can be automatically split into smaller pieces even while writing data. SBench 6 has been optimized for working with multi GByte data files. The technology makes it possible for SBench 6 to handle data from up to 16 GBytes of on-board memory as well as hard disk recordings of several GBytes.

## FFT Analysis and Display


Using the FFT calculation turns the oscilloscope like software into a spectrum analyzer. The FFT function converts time domain signals into the frequency domain. The input signal can be weighted by different window functions like Hanning, Hamming, Blackman, etc., with the resulting FFT plot being shown as dBc, dBFS, dBuV, dBm or plain voltage. The FFT analysis function can generate Amplitude, Phase and PSD (Power Spectrum Density) plots. The resulting FFT signal can also be used for further calculations like SNR, THD, MAX value or others.

FFT Analysis, like all calculation functions, can run on full signals, on the visible signal area in one display or on a selected area between cursors.

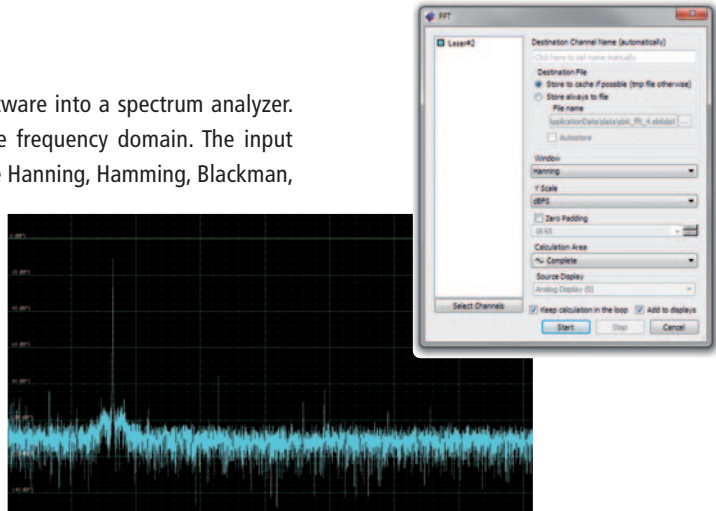


## Calculation Routines and Measuring Results

A special info window shows extended information on the current cursor positions within the display windows. Each cursor can be locked on a signal showing the precise values for the signal. Using both cursors makes it possible to obtain some simple measurement functions and, with only one mouse click, it is possible to use additional calculation routines on any signal. The signal used can be any acquired signal, any loaded signal or even a freshly calculated signal like an FFT, allowing fully nested calculations. The calculation area can be selected to be the whole signal, an area that is shown inside the display window, or the segment defined by the two cursor positions.

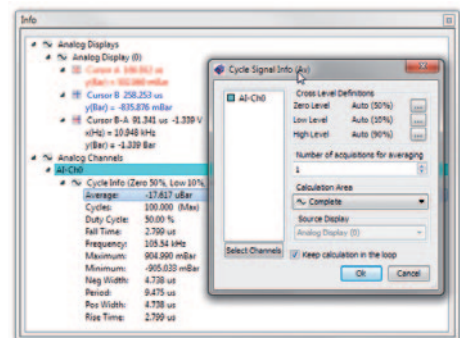

## Digital Data Display (Logic Analyzer)

Besides the acquisition and display of analog data SBench6 also contains a powerful digital data display for grouping signals into a bus and to navigate through data by edge detection and pulse measurements. The digital data display is available for pure digital acquisition cards as well as for additional digital inputs of an analog data acquisition card. Analog data can be converted to digital data and vice versa to combine different signals into a mixed mode display. Digital displays and analog displays can be synchronized to have cursor and zoom settings automatically synchronous between different displays for comprehensive Mixed Signal Analysis.

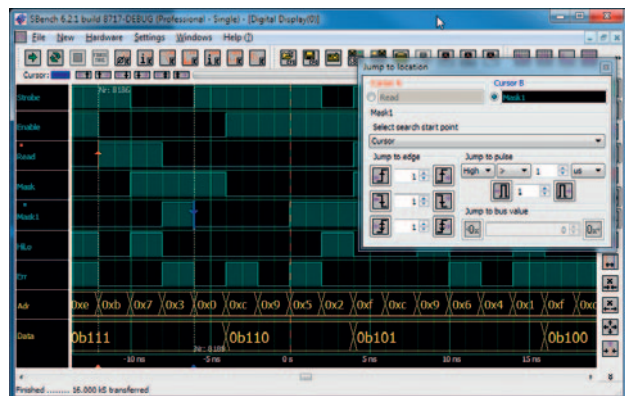

## Project Organization

The entire configuration, acquired data, reports, calculations and stored files are placed within a separate project folder. Projects can be used to organize measurement setups in production, to store, archive and share complete data sets, including all calculation and display details, or to generate default and write protected project templates for specific measurement jobs. A project is either stored as a set of sub-folders with separate files, which can be accessed individually, or it can be stored as a zip-archive that can be easily exchanged.

The project and also the separate data acquisitions can be extended by a user defined number of additional information fields. These can be made mandatory in cases that need to have a defined data set for each acquisition. The information fields can hold environmental details like temperature, used equipment, operator, additional test settings or it can be used to describe the DUT (device under test).

A project can hold a single acquisition as well as a number of automatically or manually stored acquisitions. All acquisitions can be found in a separate project data browser that also displays the acquisition information on the side.



## Reports


SBench 6 contains a powerful report editor and generator that documents the use of all components of SBench 6 for individual reports.

A report can contain analog, FFT, digital, histogram, spread and X-Y displays. Furthermore, all measurement results, cursor positions, project information, hardware information and the complete hardware configuration can be added to a report as single values or as overview tables.

Free text fields, lines and pictures can be used to add additional information to the report.


The report template itself is XML code and can be changed manually or archived with standard code managing software. The report is generated as a PDF-file and can be printed on any installed printer or stored as a pdf file. Different European and US paper formats are supported with freely definable borders, header and footer area.

The printout can be made in portrait or landscape format.

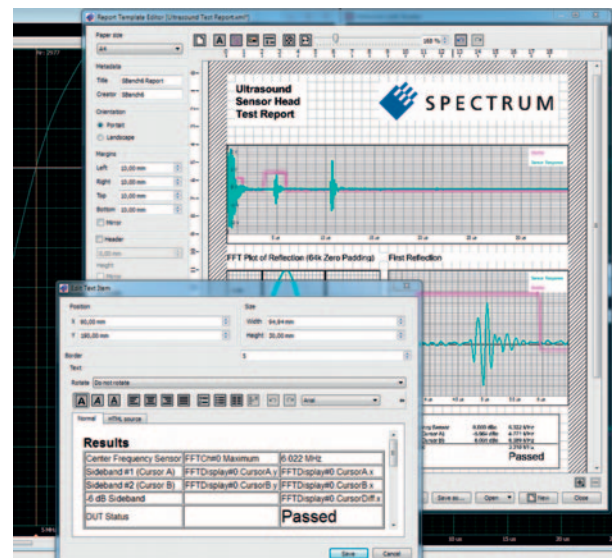

## SDK, programming own Plug-Ins (Option)

The plug-in interface is an optional SDK that allows the user to add their own advanced calculation functions to SBench 6. The SDK contains the interface and some examples that show how to program certain functionality. The self-compiled plug-in is then automatically linked into the SBench 6 calculation pool. The SDK is based on C++. Any calculation that can be realized with standard development methods is possible.

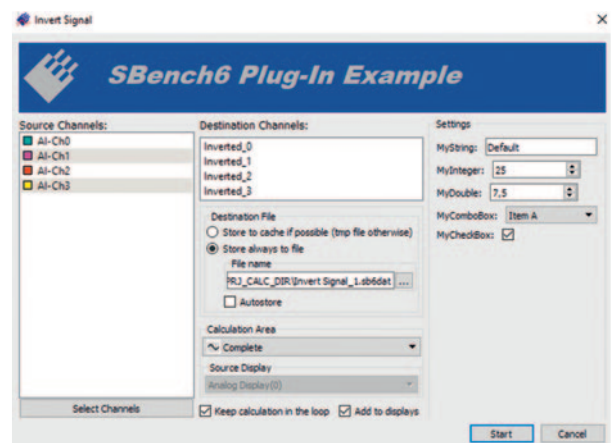


## Scripting

The scripting tool provides a simple way to utilize SBench6 in an automated sequence of operations. It allows SBench 6 to be controlled from a plain ASCII script file running some basic commands. The process allows users to do some elementary remote control and automation, like Load file, Start, Stop, Loop, Wait, Export data, Call an external program.


## Input Preview

To make setting up the input ranges of a digitizer fast and easy, an Input Channel Preview window has been added to SBench 6 Professional. The window works by continuously monitoring the input signals at a low sampling rate and then displaying their key signal characteristics using a bar graph and colours, making it immediately obvious when changes to the setting of their gain or offset may be required.

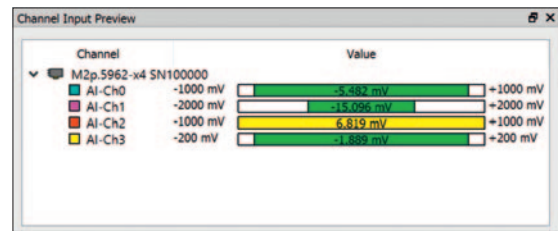

## Interpolation

The powerful interpolation feature can be used to dramatically improve parameter measurements in situations where the sampling rate of a digitizer is limiting measurement precision. Based on the  $\text{SinX}/x$  ( $\text{SinX}$ ) algorithm, the SBench 6 interpolation function inserts samples in a predictive manner between the actual acquired data points. When done correctly, this produces a waveform with a higher effective sampling rate and a closer approximation to the analogue waveform that's being analysed (see sine wave in the picture, left display without & right display with interpolation).

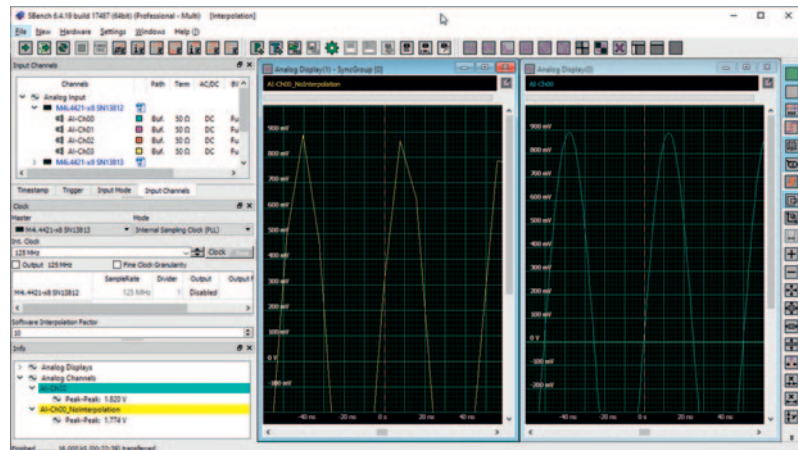


Interpolation can be also used to improve other parameter measurements such as rise and fall times, as well as cyclic measurements like frequency and period.

## Calculate Single Values

As part of the SBench 6 enhanced measurement capabilities, it is now also possible for the new Formula function to calculate single values. These values can be computed from the cursor information, any sample of a source signal or even from other calculation results.


## How-to-do videos

For your quick start into the many powerful functions of SBench 6 we've launched a series of "How-to-do" videos. Each video explains one function of the software in around two minutes. We are planning to release over 30 of these little helpers. You can find the videos on our website [www.spectrum-instrumentation.com](http://www.spectrum-instrumentation.com) in the "Support" pull-down menu as "SBench 6 Tutorials"

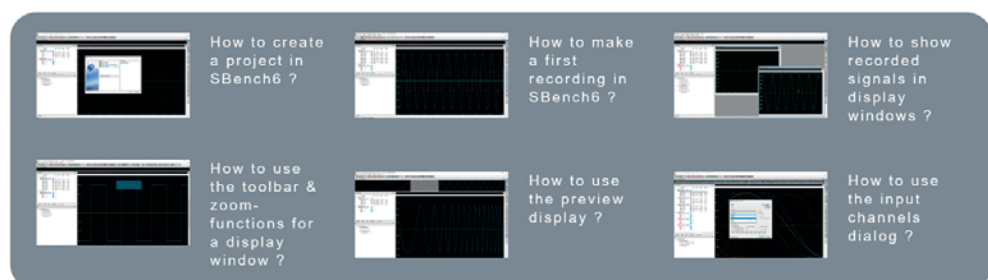

## Comments from our customers .....

Spectrum products are used in many areas of research and development. We carried out interviews with some of the scientists, so you can read their exciting user stories on our website [www.spectrum-instrumentation.com](http://www.spectrum-instrumentation.com) in the "News" and "Applications" sections. Here are some quotes from these customers about our instruments:

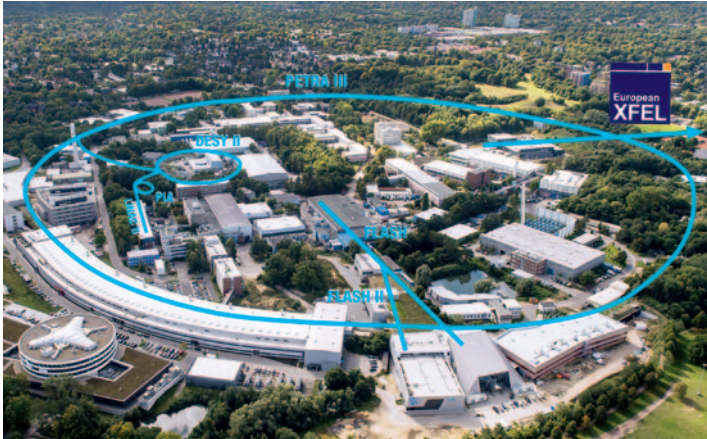

"The first digitizer cards that we bought more than 15 years ago are still in use today."

**Mark Lomperski | DESY | Particle Accelerator Monitoring**



"We use Spectrum's SBench 6 software to control the cards, which is really easy to set up and use."

**Jesse Fox, Director of IT | Dolphin Research Center Florida**  
**How dolphins could operate a computer**




"Spectrum's five-year warranty gives us peace of mind that these critical items can be relied on."

**Prof. Dr. Josef Höffner | Leibniz Institute | Atmospheric research with Lidar in Antarctica**




"We looked at proposals from other suppliers and they were either hugely over specified for what we needed with a huge price to match or could not deliver the requirements we needed."

**Paul Holligan | Head of Pulsed Power at FLF | Creating a fusion reactor by launching a projectile to hypervelocities**

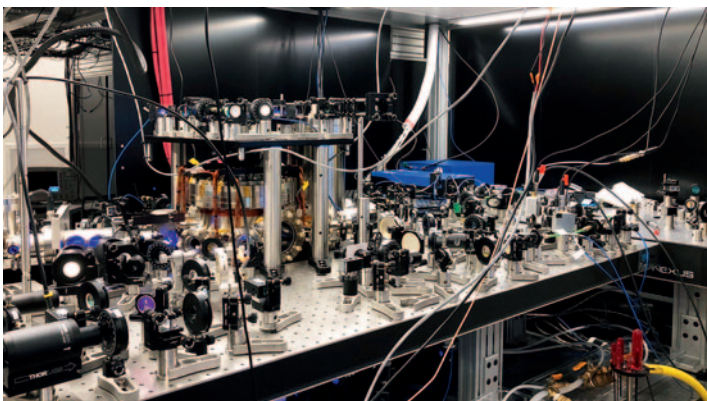

"Not only was the Spectrum AWG unbeatable on the quality of its output but it was also unbeatable on price."

**Prof. Dr. Julio Barreiro | University of California San Diego | Quantum Research**

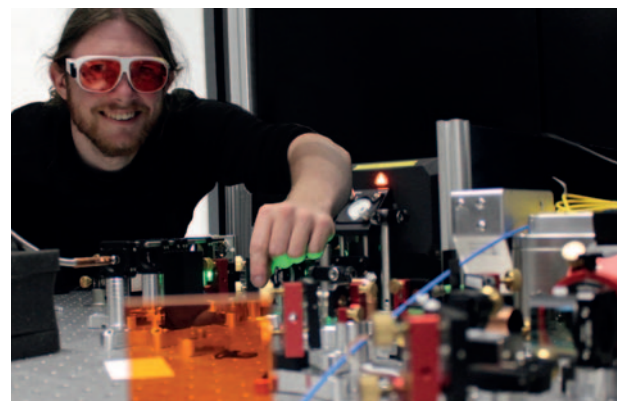


"Using the new DDS option, we have been able to make rapid progress and reduce the complexity in the system allowing us to focus on advancing the research."

**Dipl.-Phys. Jonas Witzenrath | University Kaiserslautern | Quantum Research**

"The Spectrum digitizer card has an incredibly impressive low noise floor so we could build a Moving Target Indicator (MTI) system that can see all small movements of the volcano."

**Dr. Amin Amiri | University College London | Volcano early warning systems**

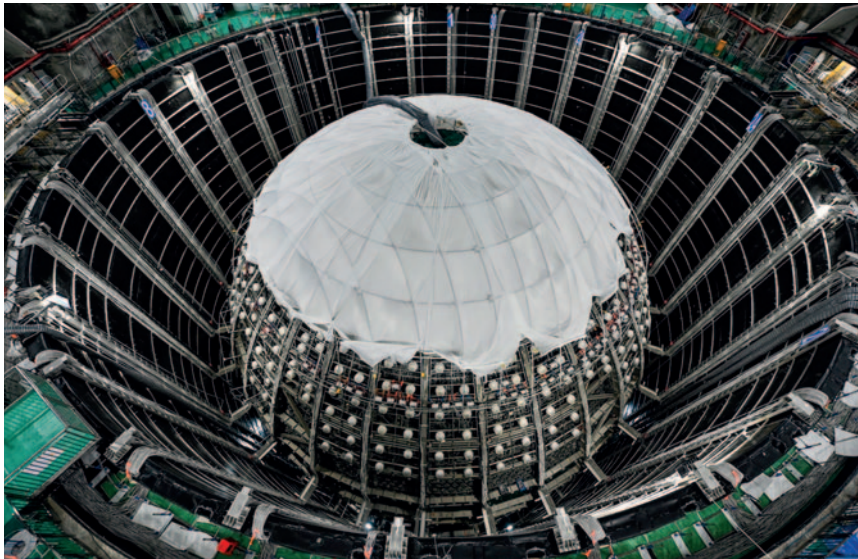

"We chose the digitizer cards from Spectrum as they provide us with state-of-the-art performance but, unlike rival offerings, they are not expensive or custom creations."

**Dr. Hans Steiger | Technical University of Munich | Largest liquid neutrino-detector of mankind**




"We have found it to be very easy and intuitive to use which means we can focus on the project."

**Prof. Hubert Mantz | University of Applied Sciences Ulm | Intelligent road radar with neural networks**

"The performance and quality of the cards is first class and they have worked perfectly from day one."

**Dr.-Ing. Sönke Gössling  
ZBT Hydrogen and fuel cell center | high performance fuel cells for cars and trucks**

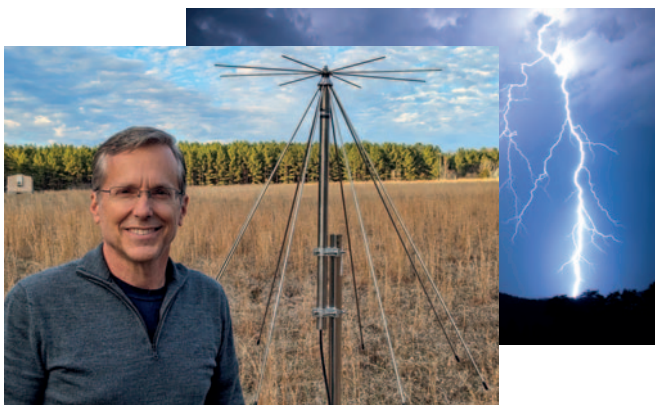

"Spectrum's measurement software SBench 6 was so easy and versatile to use that no time in this project was needed to create special software programs from scratch."

**Prof. Steven A. Cummer | DUKE University | Lightning research**



"We chose Spectrum products because they have proved to be able to deliver the extremely high level of precision and synchronization that we require."

**Adam Kingsley, PhD | Brigham Young University | Sound wave study in simulated ocean**

## ▶ 1. World-leading Digitizers and Arbitrary Waveform Generators

SPECTRUM produces ultra-fast and high-resolution products for signal capture and signal generation.

## ▶ 2. Many product variations

SPECTRUM uses a unique modular design of platform-boards and many different modules to create a wide range of products.

## ▶ 3. Perfect Fit solutions

Thanks to the modular design, every customer gets exactly their specifications, available from stock, and at a competitive price.

## ▶ 4. Backwards compatibility

SPECTRUM offers compability, advice, service and repairs for all its products of the last 20 years.

## ▶ 5. Fast time to market

Design cycles are fast at SPECTRUM, because new modules are combined with proven platform-boards.

## ▶ 6. Own software

SPECTRUM offers the easy-to-use and feature-rich "SBench 6" control software.

## ▶ 7. World class support

Customers get direct access to SPECTRUM's hardware & software engineers.

## ▶ 8. German quality built in since 1989

All SPECTRUM products are fully designed, produced and extensively tested in Germany.

## ▶ 9. Five year warranty

SPECTRUM offers an industry-leading 5-year warranty for your long-term peace of mind.

## ▶ 10. Satisfied customers

Multinational companies and leading research institutions rely on our products for leading-edge, long-term projects.



Australia




Austria



Belgium



Brazil



Bulgaria



Canada



Chile



China



Colombia



Croatia



Cyprus



Czech Republic



Denmark



Finland



France



Germany



Greece



Hungary



India



Ireland



Israel



Italy



Japan



Lithuania



Luxembourg



Malaysia



Mexico



Netherlands



New Zealand



Norway



Poland



Portugal



Puerto Rico



Saudi Arabia



Serbia



Singapore



Slovakia



Slovenia



South Africa



South Korea



Spain



Sweden



Switzerland



Taiwan



Turkey



United Kingdom



United States




Vietnam

We are headquartered in Grosshansdorf near Hamburg / Germany and operate worldwide. We are continuously expanding our presence.



## Publication .....

To keep engineers and scientists up to date with the latest developments in PC based digitizer technology Spectrum has published a handbook that covers the major product features of this powerful class of instrument and also explains when a digitizer can replace an oscilloscope. The 120 page booklet is printed in full color and includes a number of graphical images that highlight and explain key digitizer concepts and their application.

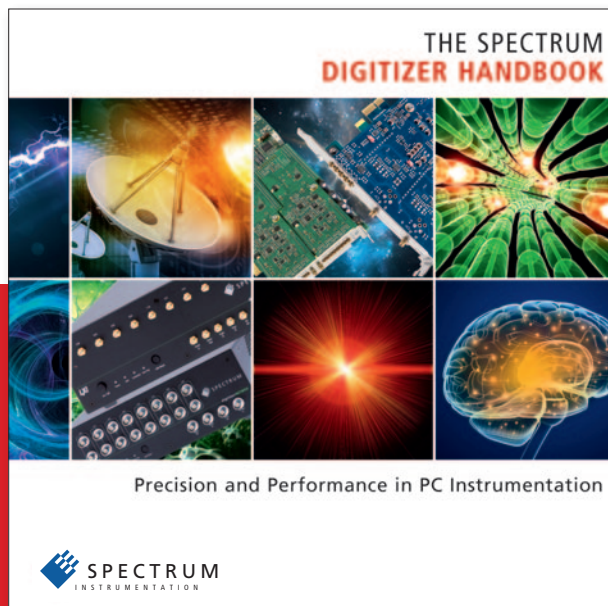

**Request your free copy of the Digitizer Handbook directly at Spectrum**

## Social Media .....

Spectrum regularly releases new products, new features, application and product notes, new software and driver versions or new videos. Follow Spectrum on one of the social media platforms to stay up-to-date:



[www.linkedin.com/company/spectrum-instrumentation](http://www.linkedin.com/company/spectrum-instrumentation)



[www.facebook.com/SpectrumInstrumentation](http://www.facebook.com/SpectrumInstrumentation)



[www.twitter.com/SpecInstruments](http://www.twitter.com/SpecInstruments)



[www.youtube.com/user/SpectrumGermany](http://www.youtube.com/user/SpectrumGermany)



[www.youku.com/user/SpectrumGermany](http://www.youku.com/user/SpectrumGermany)

## Imprint .....

### Editor

**Spectrum Instrumentation GmbH**  
Ahrensfelder Weg 13-17,  
22927 Grosshansdorf / Germany  
Phone: +49 (0)4102-6956-0  
Fax: +49 (0)4102-6956-66  
E-Mail: [info@spec.de](mailto:info@spec.de)  
Web: [spectrum-instrumentation.com](http://spectrum-instrumentation.com)

### Trademarks / registered trademarks

**Microsoft, Visual Basic, Visual C++, Visual C#, Visual J#, Visual Studio, Windows, Windows 7, Windows 8, Windows 10 and Windows 11** are trademarks or registered trademarks of Microsoft Corporation.  
**LabVIEW** is trademark or registered trademark of National Instruments Corporation.  
**Delphi** and **C++Builder** are trademarks or registered trademarks of Embarcadero Technologies, Inc.  
**MATLAB** is a trademark or registered trademark of The MathWorks, Inc.  
**PCI-SIG, PCI, PCI-X** and the **PCI EXPRESS/PCIe** design mark are registered trademarks and/or service marks of PCI-SIG.  
**SBench, digitizerNETBOX, generatorNETBOX** and **hybridNETBOX** are registered trademarks of Spectrum Instrumentation GmbH.  
**LXI** and the **LXI logo** are trademarks of the LXI Consortium Inc.  
**IVI** is a registered trademark of the IVI Foundation.  
**PXI** is a trademark of the PXI Systems Alliance.  
**Oracle** and **Java** are registered trademarks of Oracle and/or its affiliates.  
**Nvidia, Nsight** and **CUDA** are trademarks of the NVIDIA Corporation.

### Changes and copyright

Additional adaptations and changes may be necessary to the products for their technical development. We take no liability for erroneous values or printing errors.

Copyright © 2025 by Spectrum Instrumentation GmbH. Reprinting and copying is only allowed with a written permission. All rights reserved.



**Spectrum Instrumentation GmbH**

Ahrensfelder Weg 13-17 | 22927 Grosshansdorf | Germany

Phone +49 (0)4102-69 56-0 | Fax +49 (0)4102-69 56-66

info@spec.de



**Spectrum Instrumentation Corp**

401 Hackensack Ave, 4th Floor | Hackensack, NJ 07601 | USA

Phone +1 (201) 562-1999 | Fax +1 (201) 342-7598

sales@spectrum-instrumentation.com



[spectrum-instrumentation.com](http://spectrum-instrumentation.com)

